RFS CDS**E series Directional Coupler has been designed for outdoor applications covering 694 to 3800MHz. Units couple off a defined fraction of signal from 6 to 30 dB with minimal reflections or loss. The frequency range allows use with antennas and leaky cable systems and in wireless base stations. With minimal solder joints, the dissipative loss has been minimized and reliability enhanced.

FEATURES / BENEFITS

- · 20 dB coupling value
- · Low insertion loss
- · High power handling
- · Small size, Low weight
- · N-female connectors
- · Low PIM

Technical features

STRUCTURE

Product Type	Directional Coupler
Techn. Application	Indoor
Number of Input Ports	1
Number of Output Ports	2

ELECTRICAL SPECIFICATIONS

Frequency Range	MHz	694 - 3800
Connector Type		N female
Max. VSWR / Return Loss	VSWR/dB	1.25/19.1 (1.25)
Insertion Loss max.	dB	0.2
Coupling Value	dB	20
Coupling Flatness max.	dB	±1.0
Intermodulation (IM3)		-155 dBc with 2x43 dBm tones
Directivity min.	dB	20

 Impedance
 Ohm
 50

 Total Input Power
 W
 200

°C (°F)

TEMPERATURE SPECIFICATIONS

Temperature Range

MECHANICAL SPECIFICATIONS			
Height	mm (in)	16.5 (0.65)	
Width	mm (in)	63.2 (2.49)	
Length	mm (in)	159.4 (6.28)	
TESTING AND ENVIDONMENTAL			


-25 to +65 (-13 to +149)

TESTING AND ENVIRONMENTAL

Environmental Class	IP65

CDS20E-694/3800 REV : P1 REV DATE : 04 Nov 2019 **www.rfsworld.com**



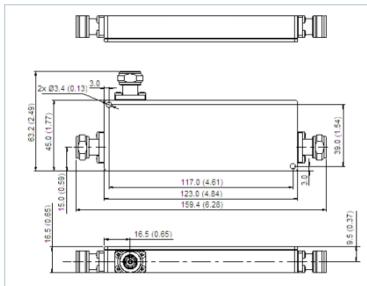

Dimensions mm(inch)

External Document Links

Notes

CDS20E-694/3800 REV : P1 REV DATE : 04 Nov 2019 **www.rfsworld.com**