



Rapid release U-links provide manual switching for high power RF circuits. Typical applications include transmitter, antenna and test load patching.

- Manufactured in custom built configurations ranging from simple patch panels to fully integrated multichannel switching
- Integrated with other components (combiners, etc)
- Housed in rack cabinet
- Blanking panels, side panels and locking rear door
- Metering
- Mimic panel with/without LED display
- Interlock circuits wired to terminal blocks



Typical patch panel in a rack with digital metering

FEATURES / BENEFITS

- Fast, simple lever action
- Slimline - low profile design
- Interlock circuits operate before the RF circuit is disturbed
- Available in five sizes to match RFS rigid line sizes/power ratings
- Standard EIA or IEC test adaptors can be used
- Input/output line sizes can be varied to suit using RFS developed R series adaptors.

Technical features

STRUCTURE

Product Line		Patch Panels
Product Type		Patch Panel, 6 port, 1-5/8" line size
Input Connector		1-5/8" Unflanged

ELECTRICAL SPECIFICATIONS


Frequency Range	MHz	44 - 70
Return Loss	dB	30
Power Rating	kW	@ MHz
Power Rating Comment		Refer Figure 2 Power rating and attenuation
Peak Voltage Rating	kV	4.7
Impedance, ohms	Ohm	50
Insertion Loss at Channel Centre Frequency	dB	-3 +/- 0.1

MECHANICAL SPECIFICATIONS

Coating		Painted
---------	--	---------

TEMPERATURE SPECIFICATIONS

Operation Temperature	°C(°F)	0 to 40 (32 to 104)
-----------------------	--------	----------------------

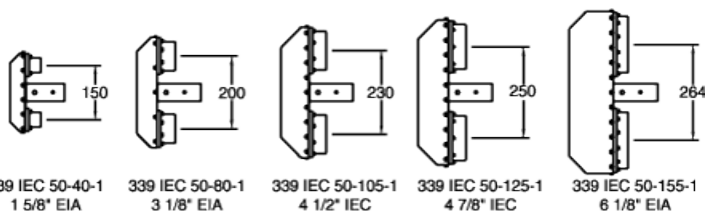


U Link sizes




PP158A6T

Patch Panel for Rapid Release U-Links 1-5/8" Line size

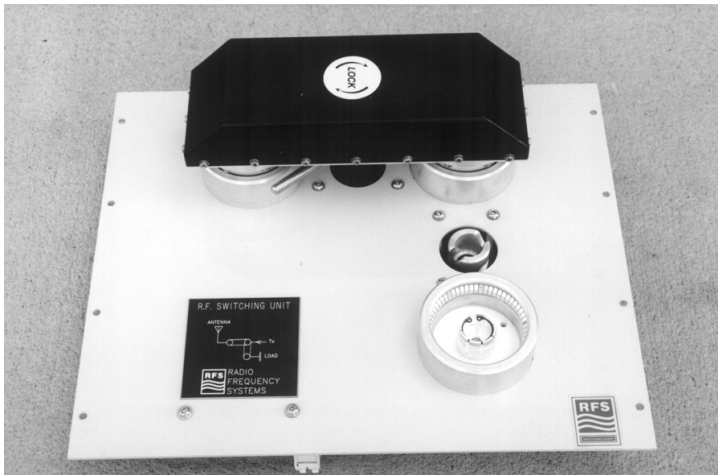

Typical 3 port patch panel

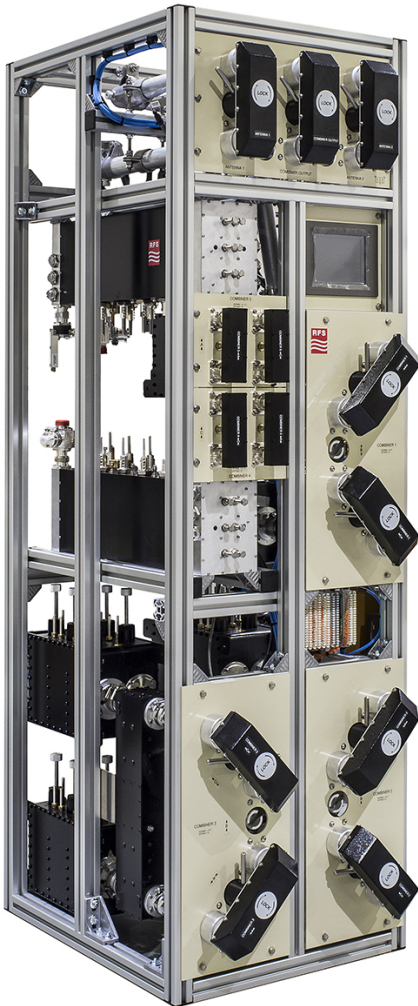

Many configurations are possible

External Document Links

[Switch frame installation instruction and power ratings and attenuation characteristics](#)

Notes



PRODUCT DATASHEET

PP158A6T

Patch Panel for Rapid Release U-Links 1-5/8" Line size



PP158A6T

REV : 01.0

REV DATE : 28 Jun 2017

www.rfsworld.com