

RADIAFLEX® Radiating Cable

Shipping & Drum Information




RFS offers L, A and H drums to accommodate your shipping and packing requirements.


Radio Frequency Systems (RFS) carefully selects proper reel sizes based on the length and overall diameter of the cable to be wound. A reel not matched to the weight of the cable could be damaged during shipment. Additionally, all cable has a minimum safe bending radius. If it is subjected to bends sharper than the minimum radius, damage to the material is likely. L, A & H drum types enhanced outdoor storage capabilities for typically > 6 months.




Drum Type (former ref.)	Drum Type (new ref.)	Width (W1)	Diameter without planking* (D1)	Weight
L 0890 / 0880	08-053-X	527mm	850mm	27Kg
L 1192 / 1180	11-077-X	770mm	1120mm	52Kg

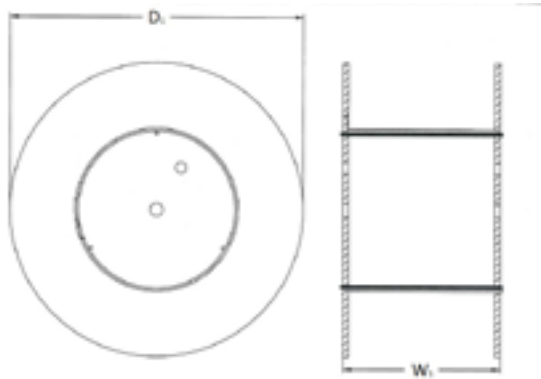


L **0/2-Reels

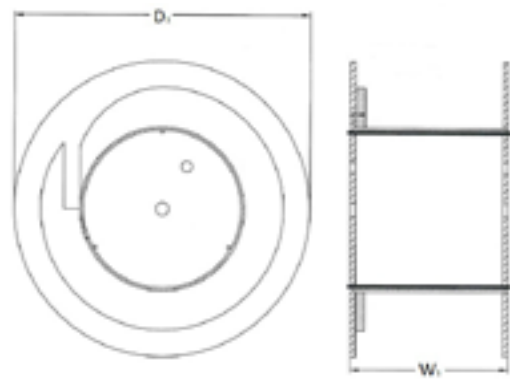

L **1/3-Reels

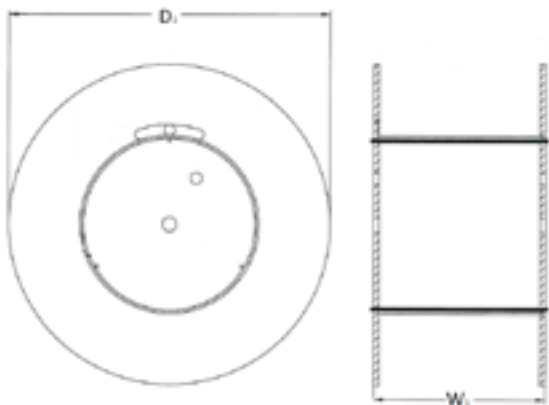

Drum Type (former ref.)	Drum Type (new ref.)	Width (W1)	Diameter without planking* (D1)	Weight
A 1350 / 1383	13-070-M	692mm	1350mm	73Kg
A 1552 / 1583	15-097-M	948mm	1500mm	92Kg
A 1710 / 1780	17-109-M	1088mm	1700mm	145Kg
A 1850 / 1883	18-066-M	638mm	1800mm	154Kg
A 2010 / 2080	20-109-M	1088mm	2000mm	214Kg
A 2150 / 2180	21-114-M	1120mm	2140mm	229Kg
A 2157 / 2187	21-115-M	1136mm	2150mm	226Kg
A 2159 / 2189	21-195-M	1946mm	2150mm	329Kg
A 2253 / 2283	22-138-M	1373mm	2240mm	366Kg
A 2551 / 2581	25-143-M	1430mm	2500mm	535Kg

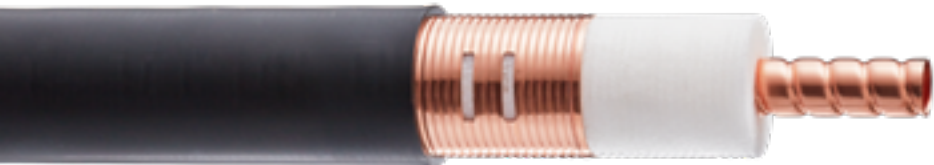

RADIAFLEX® Radiating Cable Shipping & Drum Information



		RSF12	RCF12	RLK*12	RLK*78 / RAY78	RLK*114 / RAY114	RLKX114-50B	RLK*158 / RAYA158	RAY158 / RAYS158
Former Drum Type	Carton	100m	100m						
	Drum type	not terminated	not terminated	not terminated	not terminated	not terminated	not terminated	not terminated	not terminated
L0890/0880	08-053-X	700-800m	450-590m						
L1192/1180	11-077-X	2100-2300m	1400-1650m						
A1350/1383	13-070-M			1300-1800m					
A1552/1583	15-097-M				0-1050m				
A1710/1780	17-109-M					500-690m			
A1850/1883	18-066-M				490-540m				
A2010/2080	20-109-M					1000-1220m			
A2150/2180	21-114-M				1500-2050m				
A2157/2187	21-115-M						600-800m	500-540m	
A2159/2189	21-195-M							800-1000m	
A2253/2283	22-138-M							500-595m	500-595m
A2551/2581	25-143-M							985-1120m	985-1120m

