




Clic Clamp, 7/8" RADIAFLEX polyamide black, halogen free  
fire class UL94HB

**FEATURES / BENEFITS**

Safe and efficient installation of RADIAFLEX® cable with clic-clamps. Simple mounting by using wall plugs and screws. Simply push in by hand, clamp will grip and lock by applying slight pressure.

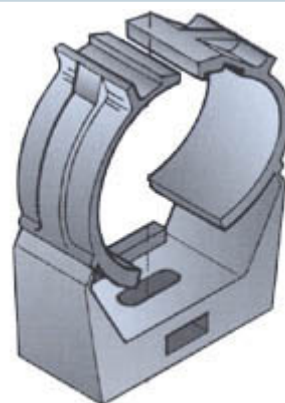

clic\_clamp\_TI

**External Document Links****Notes**

\* valid for all cable versions

\*\* order by single units

**Technical features****GENERAL SPECIFICATIONS**

|                        |  |   |
|------------------------|--|---|
| Product Line           |  | Radiating Cable Accessories               |
| Product Type           |  | Hanger                                    |
| Hanger Type            |  | Clic clamp                                |
| Transmission Line Type |  | RLF*<br>RLK*<br>RAY*78-50*A<br>RCF78-50*A |
| Cable Type             |  | Radiating Cable                           |
| Color                  |  | Black                                     |

**MECHANICAL SPECIFICATIONS**

|                                  |  |           |
|----------------------------------|--|-----------|
| Cable Size                       |  | 7/8       |
| Number of Cable / Waveguide Runs |  | 1         |
| Material                         |  | Polyamide |

**TESTING AND ENVIRONMENTAL**


|            |  |         |
|------------|--|---------|
| Fire Class |  | UL94 HB |
|------------|--|---------|

**TEMPERATURE SPECIFICATIONS**

|                          |         |                         |
|--------------------------|---------|-------------------------|
| Installation Temperature | °C (°F) | -20 to 80 (-4 to 176 )  |
| Operation Temperature    | °C (°F) | -50 to 85 (-58 to 185 ) |
| Storage Temperature      | °C (°F) | -50 to 85 (-58 to 185 ) |

**PACKAGING INFORMATION**

|                  |  |     |
|------------------|--|-----|
| Package Quantity |  | 150 |
|------------------|--|-----|

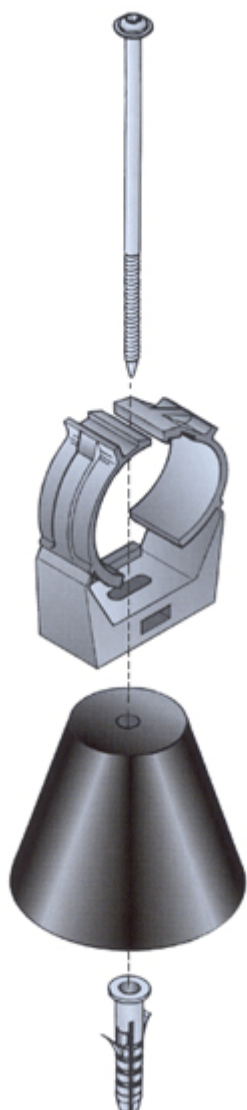

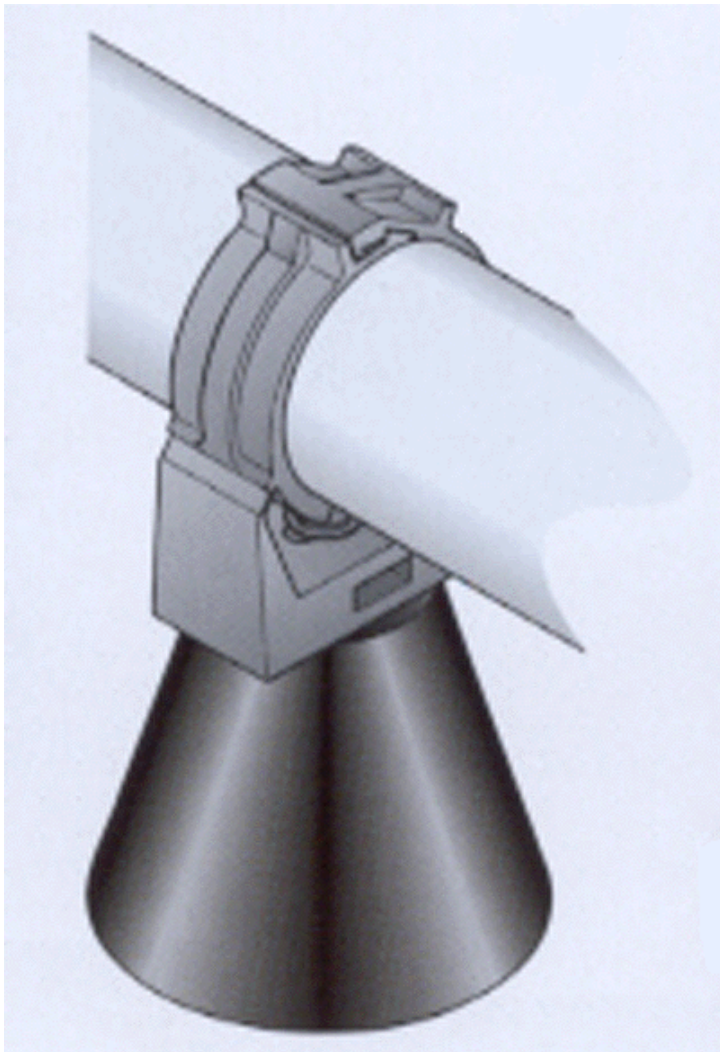


image not found or type unknown

