



Hangers for the installation of HELIFLEX® cables on different supporting profiles.

Cable Clamp and Extended Counterbed hot-galvanized steel

Screw: stainless steel.

**FEATURES / BENEFITS**

picture shows the 1L4 version  
for illustration purpose only

**External Document Links****Notes**

Hangers for flat iron 6-12 mm (0.24-0.47")

**Technical features****GENERAL SPECIFICATIONS**

Product Line		Coaxial Cable Accessories
Product Type		Hanger
Hanger Type		Flat iron 6-12mm (0.24-0.47")
Transmission Line Type		HCA550
Cable Type		Air Dielectric

**MECHANICAL SPECIFICATIONS**

Cable Size		5-1/2
Material		Cable Clamp : hot-dip galvanized Extended Counterbed : hot-dip galvanized Screw: Stainless steel
Recommended / Maximum Clamp Spacing	m (ft)	1 / 2 (3.3 / 6.6)

**TEMPERATURE SPECIFICATIONS**

Operation Temperature	°C (°F)	-50 to 85 (-58 to 185 )
Storage Temperature	°C (°F)	-50 to 85 (-58 to 185 )


**PACKAGING INFORMATION**

Package Quantity		1
------------------	--	---




## HCH-550-1R

Cable hanger for HELIFLEX® Air-dielectric coaxial cable

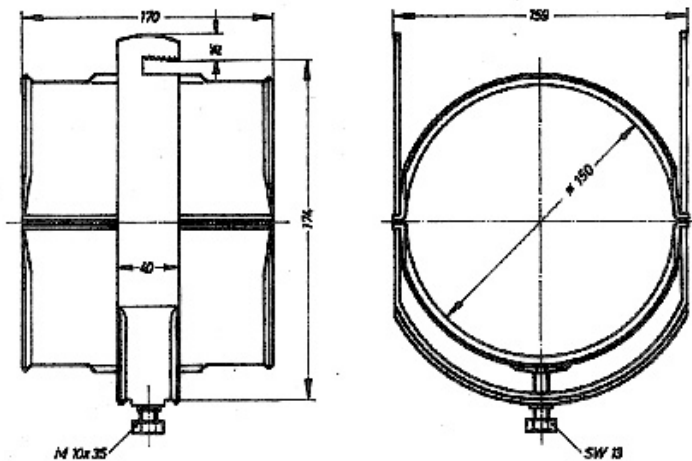


### HCH Clamps available for different types of interfaces:



**Type C**  
For anchor bar  
(18-22mm slot)



**Type L**  
For angle iron  
(in different sizes)



**Type R**  
For flat iron  
(6 – 12 mm)