


**HCH-618-1C**

Cable hanger for HELIFLEX® Air-dielectric coaxial cable

Hangers for the installation of HELIFLEX® cables on different supporting profiles.

Cable Clamp and Extended Counterbed hot-galvanized steel

Screw: stainless steel.

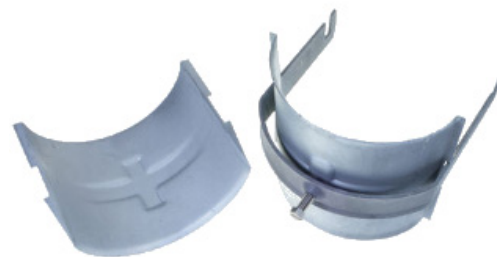FEATURES / BENEFITS

picture shows the 1L4 version
for illustration purpose only

External Document Links**Notes**

Hangers for anchor bar 18-22 mm (0.71-0.87")

Technical features**GENERAL SPECIFICATIONS**

| | | |
|------------------------|--|---------------------------------|
| Product Line | | Coaxial Cable Accessories |
| Product Type | | Hanger |
| Hanger Type | | Anchor bar 18-22mm (0.71-0.87") |
| Transmission Line Type | | HCA618 |
| Cable Type | | Air Dielectric |

MECHANICAL SPECIFICATIONS

| | | |
|----------------------------------------|--------|--------------------------------------------------------------------------------------------------------|
| Cable Size | | 6-1/8 |
| Material | | Cable Clamp : hot-dip galvanized Extended Counterbed : hot-dip galvanized Screw: Stainless steel |
| Recommended / Maximum Clamp Spacing | m (ft) | 1 / 2 (3.3 / 6.6) |

TEMPERATURE SPECIFICATIONS

| | | |
|-----------------------|---------|-------------------------|
| Operation Temperature | °C (°F) | -50 to 85 (-58 to 185) |
| Storage Temperature | °C (°F) | -50 to 85 (-58 to 185) |


PACKAGING INFORMATION

| | | |
|------------------|--|---|
| Package Quantity | | 1 |
|------------------|--|---|




HCH-618-1C

Cable hanger for HELIFLEX® Air-dielectric coaxial cable

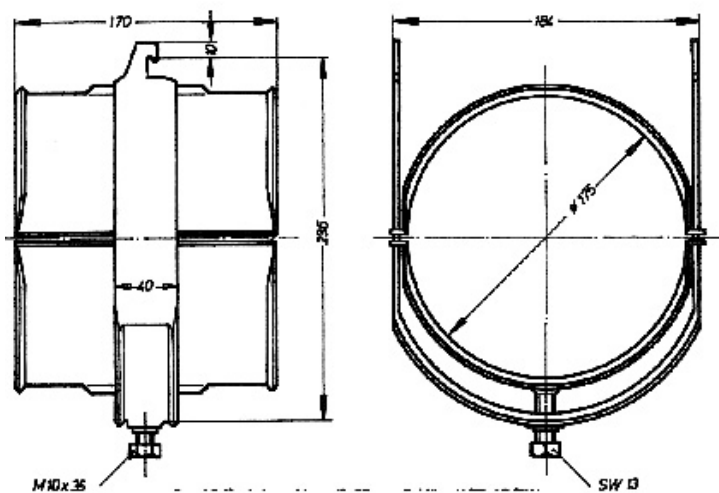

HCH Clamps available for different types of interfaces:




Type C

For anchor bar
(18-22mm slot)



Type L

For angle iron
(in different sizes)



Type R

For flat iron
(6 – 12 mm)