




The CDSE2x2-694/3800 hybrid coupler is four-port directional coupler which equally combines two wireless signals and transfers the combined signal to two output ports. The product is designed for wireless services and applications in the frequency band from 694-3800MHz including 2G/3G/4G. The broad frequency range and outstanding PIM rating is ideally suited for multi-band distributed antenna systems or in combination with RADIAFLEX® radiating cables.

FEATURES / BENEFITS

- N-female interfaces
- PIM optimized design (155dBc @ 2x43dBm)
- Ideal for all kind of DAS applications
- Low insertion loss
- High power handling

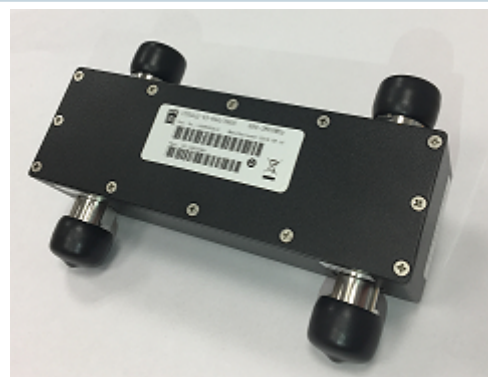

CDSE2x2-694/3800

Technical features**GENERAL SPECIFICATIONS**

Product Type		Directional Hybrid Coupler
Techn. Application		Indoor
Number of Input Ports		2
Number of Output Ports		2
Connector Type		N female

ELECTRICAL SPECIFICATIONS

Frequency Range	MHz	694 - 3800
Impedance	Ohm	50
VSWR / Return Loss	VSWR/dB	1.20/20.8 @694 - 2700 GHz 1.30/17.7 @2700 - 3800 GHz
Intermodulation (IM3)		-155 dBc (2x43dBm)
Isolation min	dB	25 @694 - 2700 22 @2700 - 3800
Coupling Value	dB	3.1 ±0.5 @694 - 3800 MHz
Total Input Power	W	300

TEMPERATURE SPECIFICATIONS

Temperature Range	°C (°F)	-25 to 65 (-13 to 149)
-------------------	---------	------------------------

MECHANICAL SPECIFICATIONS


Height	mm (in)	37.5 (1.48)
Width	mm (in)	85 (3.35)
Length	mm (in)	144.5 (5.69)

TESTING AND ENVIRONMENTAL

Environmental Class		IP65
---------------------	--	------



PRODUCT DATASHEET
CDSE2x2-694/3800
3dB Hybrid Coupler

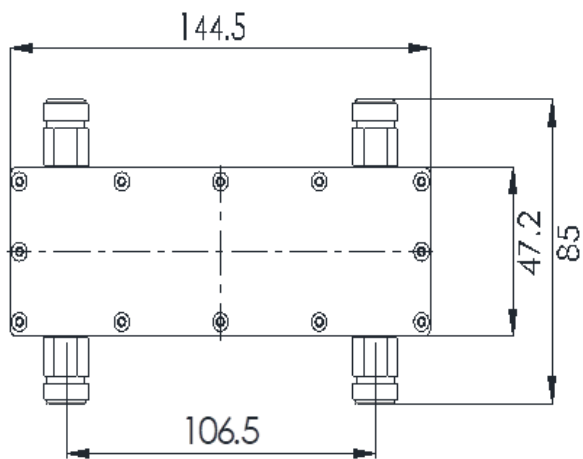

[External Document Links](#)

[Notes](#)