



The panel antenna I-ATP5-43-698/4000 is designed for broadband in-building DAS applications supporting all kind of safety as well as 4G and 5G commercial wireless communication networks. The antenna combines an aesthetical design with superior electrical characteristics notably a PIM optimized design to minimize network interferences. The antenna is constructed from lightweight materials ideal for easy ceiling mounting. The low profile and off-white radome blends easily into most building aesthetics with minimum visual impact.

**FEATURES / BENEFITS**

- Wideband omni antenna, supporting all wireless services in the frequency bands 698-960/1710- 2700MHz/3400-4000MHz
- Typically used in indoor distribution of 2G/3G/4G/5G wireless services in all standardized frequency bands
- PIM optimized antenna design (-153dBc @2x20W)
- Aesthetical visual appearance, compact and light weight
- Low return loss, stable performance
- Pigtail with 4.3-10 female connector
- Ceiling mounting



I-ATP5-43-698/4000

**Technical features****GENERAL SPECIFICATIONS**

Product Type		Panel Antenna
Techn. Application		Indoor

**MECHANICAL SPECIFICATIONS**

Number of Input Ports		1
Connectors		4.3-10 female
Connector Cable	mm (in)	200 (7.9)
Mounting Hardware included		Wall bracket, screws
Height (Less Connectors)	mm (in)	200 (7.9)
Diameter (Less Connectors)	mm (in)	4.3 ( )
Width (Less Connectors)	mm (in)	180 (7.1)
Length (Less Connectors)	mm (in)	62 (2.4)
Weight	kg (lb)	0.6 (1.32)

**ELECTRICAL SPECIFICATIONS**

Frequency	MHz	698 - 806	806 - 960	1710 - 2170	2170 - 2700	3400 - 4000
Gain, typ.	dBi	5.0 ± 1.0	6.0 ± 1.0	7.0 ± 1.0	7.5 ± 1.0	8.5 ± 1.0
max. VSWR		1.8	1.8	1.8	1.8	1.8
Beam width, Vertical, typ.	°	73	70	60	60	30
Beam width, Horizontal, typ.	°	80	80	65	60	55
Impedance, Ohm	Ω	50				
Polarization		Vertical				
Intermodulation (IM3)		-153dBc (2 x 43dBm)				
Total Input Power max.	W	50				

**MATERIAL**

Radome Material		ABS
Radome Color		White (RAL9003)


**TEMPERATURE SPECIFICATIONS**

Operation Temperature	°C (°F)	-40 to 55 (-40 to 131 )
-----------------------	---------	-------------------------



TESTING AND ENVIRONMENTAL

Environmental Class		Indoor
---------------------	--	--------

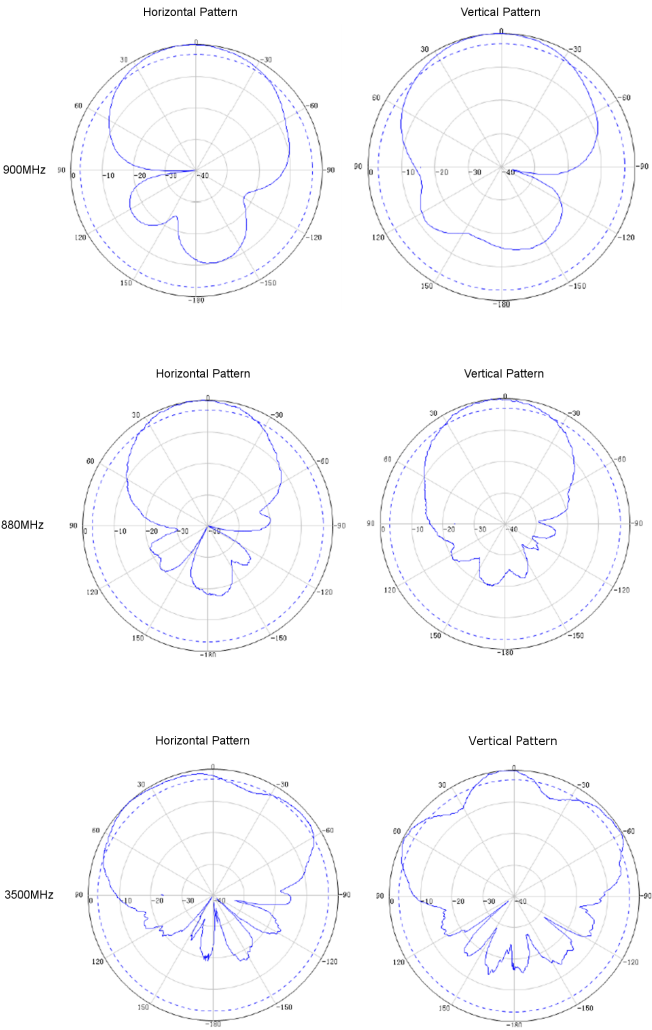

External Document Links

Notes