


Rapid Release Broadband U-Link 0 - 862MHz

Product Description

This series of the popular RFS Rapid Release U-Links has been engineered to provide a broad frequency bandwidth. Rapid Release U-Links provide manual switching for high power RF circuits and when combined with custom built patch panels, can provide facilities ranging from simply patch panels to fully integrated multi-channel switching. Please consult RFS for details.

Features

- Fast, simple lever action
- Slimline - low profile design
- Compatible with existing RFS products
- High stability performance achieved through one-piece milled aluminium body

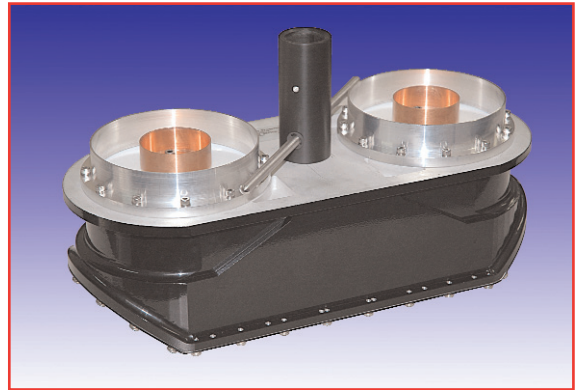

Specifications

Model	UL618F-50	UL618F-75
Frequency Range, MHz	0-820	0-862
Impedance, ohms	50	75
Return loss, dB	>38	>38
Power rating, kW @ 665 MHz	56	56
Peak voltage, kV	18.5	18.5
Connector size, in	6 1/8	6 1/8

All information contained in the present brochure is subject to confirmation at time of ordering