

The HYBRIFLEX™ solution with F/O jumpers for towers




For Greenfield sites, Network modernisation and overlays (i.e. a three sector LTE site over existing GSM and/or UMTS site)

Benefits:

- One single cable ready-to-install
- Possibility to adapt the length on both sides
- Plug and play
- Seamless caballing between BBU and RRU without any additional connectors or splices
- Excellent mechanical protection no conduits needed
- Seamless lightning protection

Supports Application:

Number of RRU	F/O type	Number of fiber pairs	DC / mm ²
3	Single Mode or Multimode	3 or 6 (LTE ready)	4, 6, 10

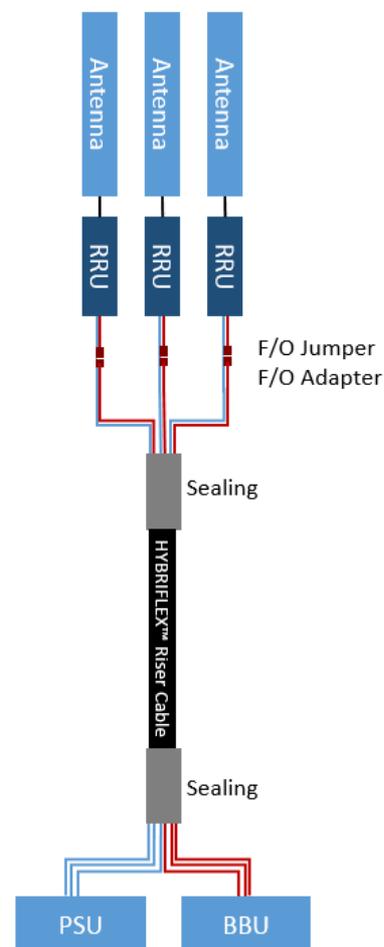

Supported RRU vendor specific connectors for

- ZTE
- ALU
- NSN
- HUAWEI
- Ericsson
- others on request

Kit content:

- 3 RRU DIRECT cable (with outdoor connectors on top side)
- 3 F/O adapters including fixing braked
- 3 F/O Jumper with OEM specific connectors
- HYBRISEAL SHRINK-FIT
- HYBRISEAL COMPRESSION-FIT
- Clamps
- Grounding Kits

Logistics:

Individual Kits (Customer choice of top break out length, bottom break out length, main Riser cable length)

Pre-defined kits (20, 30, 40, 50, 60, 70, 80, 90, 100 m)

Specifications subject to change without notice

Copyright © 2014 Radio Frequency Systems. All rights reserved