


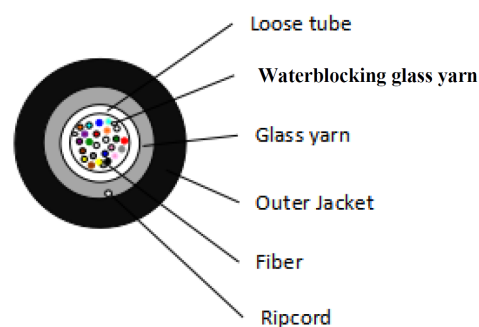

HYBRIFLEX fiber only round drop cable, multi-fiber single mode, gel free, water blocking, LSZH, indoor cable with integrated rip cord. Optimized for Radio over Fiber (RoF) applications, for use within the RFS "Conventional" RoF solution.

**FEATURES / BENEFITS**

- Incorporates multiple, single mode optical fibers ensuring future proof connectivity for RoF (and other) high bandwidth, multi wavelength applications
- Fibers housed in high-modulus plastic and with water-blocking yarn around
- Aramid and water blocking glass-fiber yarns are applied as strength member
- High quality raw material guarantees the long service life of cable
- Flame retardant, LSZH materials for use inside buildings
- Integrated rip cord

**External Document Links****Notes**

When more than 12 fibers, fibers 13-24 will follow same color scheme and additionally be marked with a black tracer.

**Technical features****STRUCTURE**

Cable Type		Fiber optic cable
Fire Performance		Flame Retardant
Optical Fiber Color		Red/Green/Blue/Yellow/Grey/Violet/Brown/Orange/White/Pink/Black/Aqua
Number of Fiber		24

**MECHANICAL SPECIFICATIONS**

Cable Weight	kg/m (lb/ft)	0.096 (0.065)
--------------	--------------	---------------

**CABLE JACKET**

UV-Protection Individual and External Jacket		Yes for External Jacket Only
Jacket Material		LSZH Black
Outer Diameter Nominal	mm (in)	8.8 (0.35)

**F/O CABLE SPECIFICATIONS**

F/O Cable Type		G657-A2 Single Mode, Bend Tolerant
Core/Clad	μm	9 /125
Secondary Protection Nominal	μm (in)	240 (0.009)
Single Bending Radius	mm (in)	10 (0.394)
F/O Standards (Meets or Exceeds)		ITU-T G657A2; RoHS Compliant
Fiber Attenuation	dB/km	Max: $\leq 0.37\text{dB/km}@ \lambda=1310\text{nm}$ & $\leq 0.24\text{dB/km} \lambda=1550\text{nm}$
Zero Dispersion Slope		$\leq 0.092 \text{ ps/km nm}^2$
Dispersion (1285 - 1340 nm)		-3.5 ~ 3.5ps/(nm km)
Mode Field Diameter (@ 1310 nm)		8.8
Cutoff wavelength cable		$\leq 1260 \text{ nm}$

**TESTING AND ENVIRONMENTAL**

Storage Temperature	°C (°F)	-40 to 70 (-40 to 158 )
Operation Temperature	°C (°F)	-30 to 70 (-22 to 158 )
Installation Temperature	°C (°F)	-5 to 60 (23 to 140 )
LSZH Specification		IEC 60332-1

**FOGT-01x24SA2-F00**

HYBRIFLEX® Fiber Optic Drop Cable, 24 Fiber Single Mode, LSZH, Indoor

	1	2	3	4	5	6	7	8	9	10	11	12
Fibre Color Code	Red	Green	Blue	Yellow	Grey	Violet	Brown	Orange	White	Pink	Black	Aqua
	13	14	15	16	17	18	19	20	21	22	23	24
	Red	Green	Blue	Yellow	Grey	Violet	Brown	Orange	White	Pink	Natural	Aqua