




HA-AD-MM-40

Hybriflex Adapter, MTP/MPO compact

Compact MTP/MPO adapter with reduced flange. This adapter enables up to 12 backbone fibers to be connected to span connect and/or breakout cables without the need for additional protection in wall boxes or enclosures. The connection point for the MTP cables can be made simply within wall, floor or ceiling voids.

FEATURES / BENEFITS

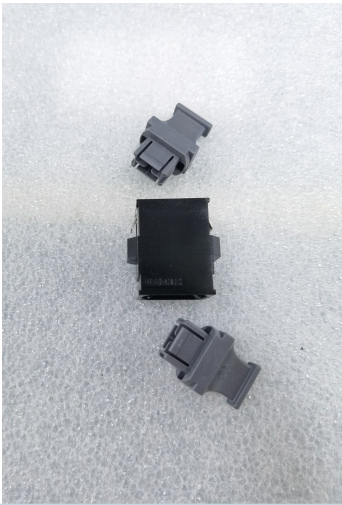

External Document Links

Notes

Technical features

GENERAL SPECIFICATIONS

Product Type		Hybriflex Adapter
--------------	--	-------------------

MECHANICAL SPECIFICATIONS

Material		Polyetherimide
----------	--	----------------

TESTING AND ENVIRONMENTAL

Operation Temperature	°C (°F)	-10 to 55 (14 to 131)
-----------------------	---------	------------------------

F/O CABLE SPECIFICATIONS

Insertion Loss		≤ 0.3dB
Repeatatability / durability		≤ 0.3dB for 500 mate/de-mate cycles
Standard		IEC 61754-7 and TIA 604-5 Type MPO