




PRODUCT DESCRIPTION

RFS' HYBRIFLEX Remote Radio Head (RRH) hybrid feeder cabling solution combines optical fiber and DC power for RRHs in a single lightweight aluminum corrugated cable, making it the world's most innovative solution for RRH deployments. It was developed to reduce installation complexity and costs at Cellular sites. HYBRIFLEX allows mobile operators deploying an RRH architecture to standardize the RRH installation process. HYBRIFLEX combines optical fiber (multi-mode or single-mode) and power in a single corrugated cable. It may eliminate the need for junction boxes and can connect multiple RRHs with a single feeder. Standard RFS CELLFLEX® accessories can be used with HYBRIFLEX cable.

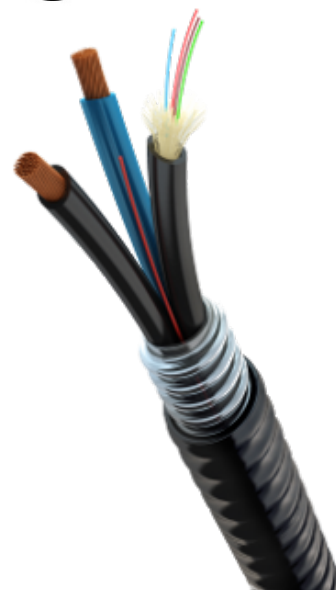

HYBRIFLEX Representative Image
Specific Cables May Vary

FEATURES / BENEFITS

- Aluminum corrugated armor with outstanding bending characteristics - Minimizes installation time and enables mechanical protection and shielding
- Outer conductor grounding - Saves on installation costs
- Lightweight solution and compact design - Decreases tower loading
- Robust cabling - Eliminates need for expensive cable trays and ducts
- Installation of tight bundled fiber optic cable pairs directly to the RRH - Reduces CAPEX and wind load by eliminating need for interconnection
- Optical fiber and power cables housed in single corrugated cable - Saves CAPEX by standardizing RRH cable installation and reducing installation requirements
- UL-Listed, flame-retardant jacket, UV protected - Allows both indoor and outdoor applications

Technical features

STRUCTURE

Cable Type		HYBRIFLEX®
Size		1/2
Fire Performance		Flame Retardant

DC POWER CABLE SPECIFICATIONS

Number of DC Pairs		1
Maximum DC-Resistance Power Cable	Ω/km (Ω/kft)	3.41 (1.04)
Cross Section of Power Cable	mm ² (AWG)	5.3 (10)
DC Wire Jacket Material		PVC/Nylon
DC Cable Single Bending Radius	mm (in)	83 (3.3)
DC Standards (Meets or Exceeds)		For use in Type MC per UL 1569, PVC Nylon, RoHS/REACH Compliant

MECHANICAL SPECIFICATIONS

Outer Diameter Nominal	mm (in)	15.8 (0.62)
Cable Weight	kg/m (lb/ft)	0.36 (0.24)
Minimum Bending Radius, Single Bend	mm (in)	76.2 (3)
Minimum Bending Radius, Multi Bends	mm (in)	127 (5)
Recommended / Maximum Clamp Spacing	m (ft)	1 / 1.2 (3.25 / 4)



ARMOR SPECIFICATIONS

Armor Type		Corrugated Aluminum
Maximum DC-Resistance of Armor	Ω/km (Ω/kft)	2.4 (0.73)
Diameter Corrugated Armor	mm (in)	13.8 (0.55)

CABLE JACKET

UV-Protection Individual and External Jacket		Yes
Jacket Material		Flame Retardant, indoor/outdoor, PVC, Black
Jacket Specifications		UL1569 Type MC, UL Listed

F/O CABLE SPECIFICATIONS

F/O Cable Type		G657-A2 Single Mode, Bend Tolerant
Number of F/O Pairs		2
Core/Clad	μm	9 /125
Secondary Protection Nominal	μm (in)	900 (0.035)
F/O Standards (Meets or Exceeds)		UL Listed Type OFNR (UL1666), RoHS Compliant

TESTING AND ENVIRONMENTAL

Storage Temperature	°C (°F)	-40 to 70 (-40 to 158)
Operation Temperature	°C (°F)	-40 to 65 (-40 to 149)
Installation Temperature	°C (°F)	-20 to 65 (-4 to 149)

External Document Links

