



Single Multi block hanger support systems are designed for organizing bundled runs of coax cable.

Each space-saving block securely holds one run of coax, allowing a compact bundle of up to 3x runs to be supported by stacking three blocks.

FEATURES / BENEFITS

- Single Multi Blocks are manufactured of polypropylene providing thermal, chemical and UV resistance in all environments.
- They come including angle member adapter and necessary hardware.
- The angle member adapter fastens the clamp to the tower without drilling.
- The angle member adapter includes a tower member set screw.
- The hanger mounting rod may be located in either of two mounting holes, depending on orientation of the fixing member.
- Compliant to RoHS (EU 2002/95/EC) and CRoHS (China SJ/T11363-2006) i.e. usable on a global basis.



picture shows MBHS78-3-F for illustration purpose

External Document Links

[Installation Instruction](#)

Notes

For applications under wind speed conditions from 160 km/h (100 mph) up to 200 km/h (125 mph) a maximum clamp spacing of 0.7m (2.3 ft) must not be exceeded.

Technical features**GENERAL SPECIFICATIONS**

Product Line		Coaxial Cable Accessories Hybrid Cable Accessories
Product Type		Hanger
Hanger Type		Single Multi-block
Transmission Line Type		UCF114 LCFS114 LCF114 HB114
Cable Type		Coaxial Foam Dielectric Hybrid
Color		Black

MECHANICAL SPECIFICATIONS

Cable Size		1-1/4
Number of Cable / Waveguide Runs		1 per layer, 3 layers, 3 runs
Configuration		incl. Angle member adapter
Angle member adapter clamping range mm (in)		4 / 24 (0.157 / 0.945)
Angle member adapter threads		2x M8
Material		Metal part: Stainless steel Plastic parts: Polypropylene
Length	mm (in)	290 (11.4) see picture below (L)
Height	mm (in)	80 (3.15) see picture below (H)
Width	mm (in)	50 (1.96) see picture below (W)
Recommended / Maximum Clamp Spacing	m (ft)	0.9 / 1.2 (2.95 / 4)



MBHS114-3-F


Single Multi-block hanger, with angle member adapter

TEMPERATURE SPECIFICATIONS

Operation Temperature	°C (°F)	-50 to 85 (-58 to 185)
Storage Temperature	°C (°F)	-50 to 85 (-58 to 185)

PACKAGING INFORMATION

Package Quantity		10
Weight per piece	kg (lb)	0.35 (0.77)
Weight per kit	kg (lb)	3.7 (8.15)

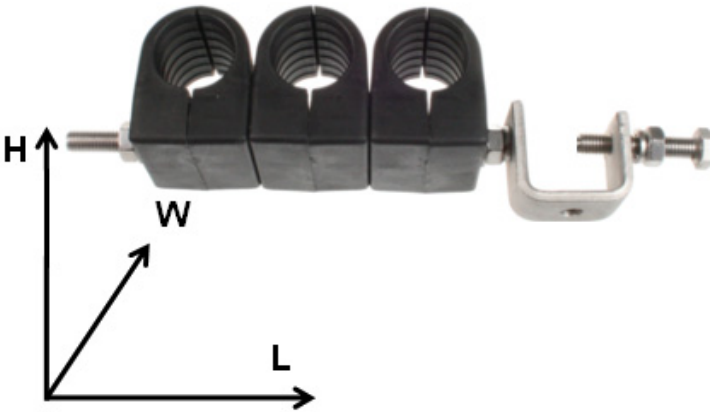

picture shows MBHS78-3-F for illustration purpose