

**MBHS12-2-F**

Single Multi-block hanger two layer, with angle member adapter

Single Multi block hanger support systems are designed for organizing bundled runs of coax cable.

Each space-saving block securely holds one run of coax, allowing a compact bundle of up to 3x runs to be supported by stacking three blocks.

FEATURES / BENEFITS

- Single Multi Blocks are manufactured of polypropylene providing thermal, chemical and UV resistance in all environments.
- They come including angle member adapter and necessary hardware.
- The angle member adapter fastens the clamp to the tower without drilling.
- The angle member adapter includes a tower member set screw.
- The hanger mounting rod may be located in either of two mounting holes, depending on orientation of the fixing member.
- Compliant to RoHS (EU 2002/95/EC) and CRoHS (China SJ/T11363-2006) i.e. usable on a global basis.



picture shows MBHS78-2-F for illustration purpose

External Document Links

[Installation Instruction](#)

Notes**Technical features****GENERAL SPECIFICATIONS**

| | | |
|-------------------------------|--|---|
| Product Line | | Coaxial Cable Accessories Hybrid Cable Accessories |
| Product Type | | Hanger |
| Hanger Type | | Single Multi-block |
| Transmission Line Type | | LCF12 HCA12-50 HB012 |
| Cable Type | | Coaxial Foam Dielectric Hybrid |
| Color | | Black |

MECHANICAL SPECIFICATIONS

| | | |
|--|---------|---|
| Cable Size | | 1/2 |
| Number of Cable / Waveguide Runs | | 1 per layer, 2 layers, 2 runs |
| Configuration | | incl. Angle member adapter |
| Angle member adapter clamping range mm (in) | | 4 / 24 (0.157 / 0.945) |
| Angle member adapter threads | | 2x M8 |
| Material | | Metal part: Stainless steel Plastic parts: Polypropylene |
| Length | mm (in) | 155 (6.10) see picture below (L) |
| Height | mm (in) | 50 (1.96) see picture below (H) |
| Width | mm (in) | 50 (1.96) see picture below (W) |
| Recommended / Maximum Clamp Spacing | m (ft) | 0.6 / 1 (2 / 3.25) |

TEMPERATURE SPECIFICATIONS

| | | |
|------------------------------|---------|-------------------------|
| Operation Temperature | °C (°F) | -50 to 85 (-58 to 185) |
| Storage Temperature | °C (°F) | -50 to 85 (-58 to 185) |




MBHS12-2-F

Single Multi-block hanger two layer, with angle member adapter

PACKAGING INFORMATION

| | | |
|------------------|---------|--------------|
| Package Quantity | | 10 |
| Weight per piece | kg (lb) | 0.178 (0.39) |
| Weight per kit | kg (lb) | 2 (4.41) |

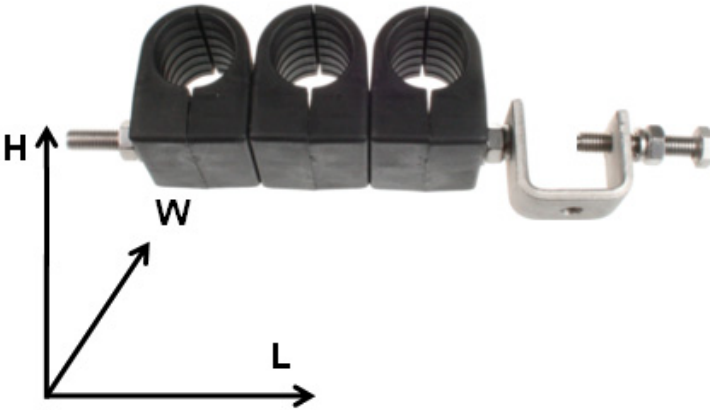

picture shows MBHS78-3-F for illustration purpose