



Multi block hanger support systems are designed for organizing bundled runs of coax cable and trunk cable.

Each space-saving block securely holds two runs of cables, allowing a compact bundle of up to 6x runs to be supported by stacking three blocks.

FEATURES / BENEFITS

Multi Blocks are manufactured of polypropylene providing thermal, chemical and UV resistance in all environments.


They come including angle member adapter and necessary hardware.

The angle member adapter fastens the clamp to the tower without drilling.

The angle member adapter includes a tower member set screw.

The hanger mounting rod may be located in either of two mounting holes, depending on orientation of the fixing member.

Compliant to RoHS (EU 2002/95/EC) and CRoHS (China SJ/T11363-2006) i.e. usable on a global basis.

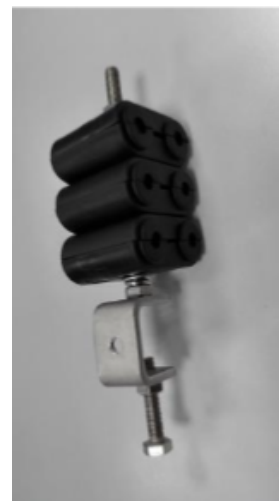

[External Document Links](#)

[Notes](#)

Technical features

GENERAL SPECIFICATIONS

Product Line		Hybrid Cable Accessories
Product Type		Hanger
Hanger Type		Multi-block
Transmission Line Type		F/O cable fixation LCF12 clamp with rubber inlet
Color		Black

MECHANICAL SPECIFICATIONS

Cable Size		1/2
Number of Cable / Waveguide Runs		2 per layer, 3 layers, 6 runs
Configuration		Incl. Angle member adapter
Material		Metal parts: -Connecting devices:Stainless steel -Angle member adapter: Stainless steel -Plastic parts: Polypropylene
Length	mm (in)	162 (6.38)
Height	mm (in)	50 (1.96)
Width	mm (in)	50 (1.96)
Recommended / Maximum Clamp Spacing	m (ft)	1 / 1.2 (3.25 / 4)

TEMPERATURE SPECIFICATIONS

Operation Temperature	°C (°F)	-40 to 85 (-58 to 185)
Storage Temperature	°C (°F)	-40 to 85 (-58 to 185)

PACKAGING INFORMATION

Weight per piece	kg (lb)	0.18 (0.4)
------------------	---------	------------



MBHT07-6-F

Multi-block hanger with three layer, with angle member adapter

