




Contact Shim for PBR220

**FEATURES / BENEFITS**

Waveguide installation

- The shim offers pressure tightness between two gasket sealed flanges
- The shim offers maximum possible RF contact.

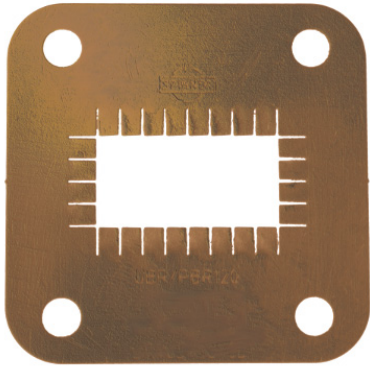

**Technical features**

**STRUCTURE**

Type of Rectangular Waveguide Component		Contact Shim
Waveguide Size IEC (EIA)		R220 (WR42)
Flange		UBR220
Flange Finish		un-plated
Package Quantity		1

**ELECTRICAL SPECIFICATIONS**

Frequency Range	GHz	17.6 - 26.7
Minimum Return Loss (max. VSWR)	dB (VSWR)	46.1 (1.01)

**MATERIAL**

Material		Copper beryllium
----------	--	------------------

External Document Links

Notes