




This connecting kit allows to attach the sway bar on any kind of support (pipes or L-sections) without needing to drill holes in the structure.

FEATURES / BENEFITS

- The RFS universal fixation kit SMA-SKO-UNIVERSAL allows to attach the sway bars of RFS 3ft and 4ft antennas onto towers, without drilling holes.
- This kit has been engineered and dimensioned to match all scenarios that occur in the field (pipes and L-sections).
- The kit is made of materials (stainless steel and hot-dip galvanized steel) with proven mechanical and environmental performance.
- Easy to install, less bulky, robust, this kit contributes to a perfect installation of RFS 3ft and 4ft antennas, from both a safety and a sustainability perspective.

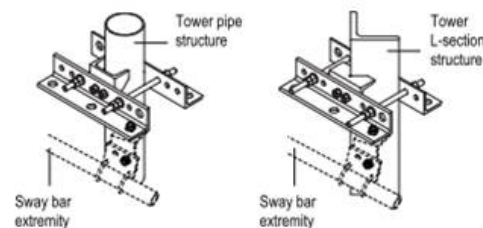

Technical features

MECHANICAL PROPERTIES

| | | |
|-----------------|---------|------------|
| Diameter | m (ft) | |
| Weight | kg (lb) | 4.5 (8.81) |

STRUCTURE

| | | |
|---------------------|--|--|
| Product Type | | Sway Bar Fixation Hardware |
| Kit Type | | Sway Bar / Tower Fixation Kit |
| Material | | Stainless steel & Hot-dip galvanised steel |

External Document Links

[Sway bar / tower fixation installation kit](#)

Notes

Tower pipe compatibility : Ø48mm up to Ø114mm.
 Tower L-section compatibility : L 40mm x 40mm up to L 110mm x 110mm.
 Compatible with RFS sway bar models in following diameters : Ø27mm and Ø33mm.
 Approximative weight : 3.5kg.
 Only the red marked parts are delivered with the kit (see picture).
 Tower pipe compatibility : Ø48mm up to Ø114mm.
 Tower L-section compatibility : L 40mm x 40mm up to L 110mm x 110mm.
 Compatible with RFS sway bar models in following diameters : Ø27mm and Ø33mm.
 Approximative weight : 3.5kg.
 Only the red marked parts are delivered with the kit (see picture).