




Rectangular Waveguide R 40 Straight Section,  
flanges PDR/UDR 40, f= 3.22-4.900 GHz,  
VSWR max 1.03, A=100mm (3.9in),  
gasket and screw kit enclosure  
made of brass

**FEATURES / BENEFITS**

Waveguide installation

- The rectangular waveguide component provides simple installation in particular difficult cases
- It can be installed where less space is available
- It provides outstanding electrical performance

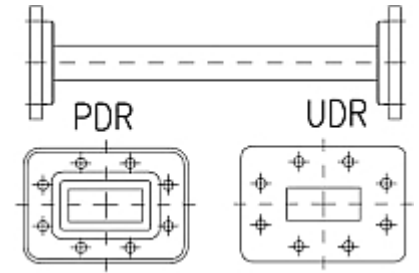

**Technical features**

**STRUCTURE**

Type of Rectangular Waveguide Component		Straight Section
Waveguide Size IEC (EIA)		R40 (WR229)
Flange A		PDR40
Flange B		UDR40
Flange Finish		Brass un-plated
Package Quantity		1

**ELECTRICAL SPECIFICATIONS**

Minimum Return Loss (max. VSWR)	dB (VSWR)	36.6 (1.03)
---------------------------------	-----------	-------------

**MECHANICAL SPECIFICATIONS**

Length	mm (in)	100 (3.9)
--------	---------	-----------

**MATERIAL**

Material		Brass
Color		Black

External Document Links

Notes