

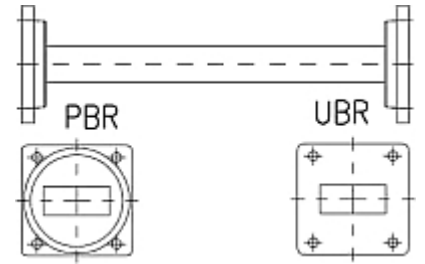


Rectangular Waveguide R 140 Straight Section,
flanges PBR/UBR 140, f= 11.9-18.8 GHz,
VSWR max 1.05, A=100mm (3.9in),
gasket and screw kit enclosure
made of copper

FEATURES / BENEFITS

Waveguide installation

- The rectangular waveguide component provides simple installation in particular difficult cases
- It can be installed where less space is available
- It provides outstanding electrical performance

**Technical features****STRUCTURE**

Type of Rectangular Waveguide Component		Straight Section
Waveguide Size IEC (EIA)		R140 (WR62)
Flange A		PBR140
Flange B		UBR140
Flange Finish		Brass un-plated
Package Quantity		1

ELECTRICAL SPECIFICATIONS

Minimum Return Loss (max. VSWR)	dB (VSWR)	32.3 (1.05)
---------------------------------	-----------	-------------

MECHANICAL SPECIFICATIONS

Length	mm (in)	100 (3.9)
--------	---------	-----------

MATERIAL

Material		Copper
Color		Black

External Document Links

Notes