




Optical fiber wall outlet for local termination of up to four optical fibers.

The unit includes fiber management and splice protection together with up to four SC/APC adapters and pigtails.

#### FEATURES / BENEFITS

- Individual shutters provide dust protection for unused ports
- Full fiber management ensures optimum optical performance
- Splice protectors included
- Optional power connector included
- DIN 35 mountable

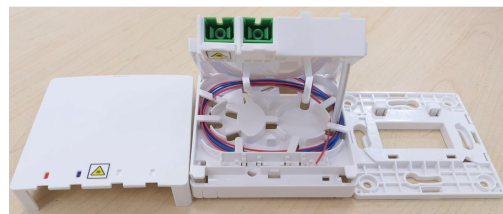

#### External Document Links

#### Notes

## Technical features

### GENERAL SPECIFICATIONS

Product Type		Wall Outlet Box
--------------	--	-----------------

### MECHANICAL SPECIFICATIONS

Material		ABS or PC+ABS
Dimensions (LxWxD)	mm (in)	80 x 80 x 31 (3.15 x 3.15 x 1.22)
Mounting		IP50 wall-mounted / recessed or DIN 35mm rail installation (IP40)

### TESTING AND ENVIRONMENTAL



Operation Temperature	°C (°F)	-20 to 65 (-4 to 149 )
Storage Humidity		≤ 95% (+40 °C)

### CABLES SUPPORTED


Supported F/O Connections		SC/APC flangeless
Diameter of Jumper Cable	mm (in)	0.9 (0.035)

### FAMILY INFORMATION


	WOIF-0Z02SS-APMW-YC	WOIF-0Z04SS-APMW-YC
Quantity of Adapters	2	4
Quantity of Pigtails	2	4

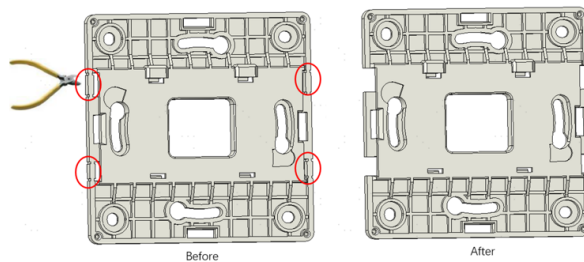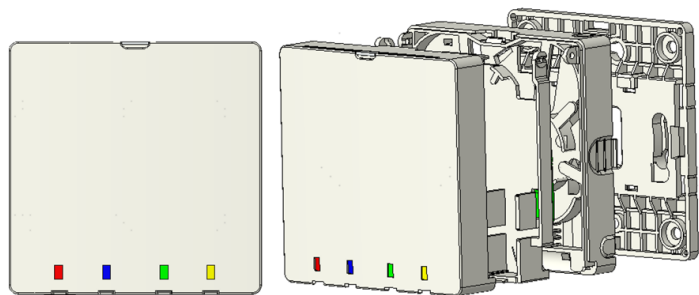

Din 35 mounting

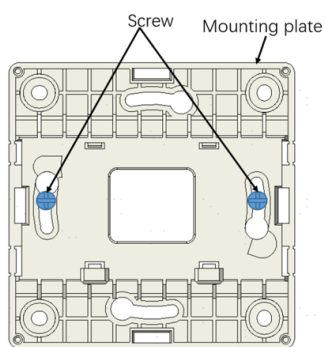






Wall mounting

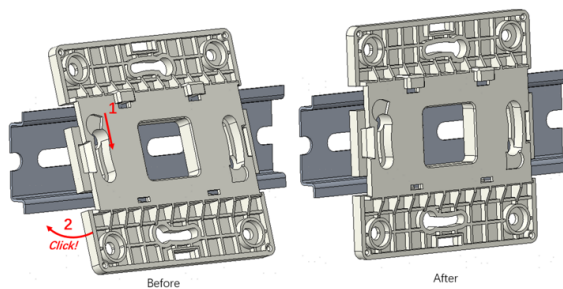



## WOIF-0ZXXSS-APMW-YC

Optical Fiber Wall Outlet Box, surface mount including 2 or 4 x SC/APC adapters & pigtails

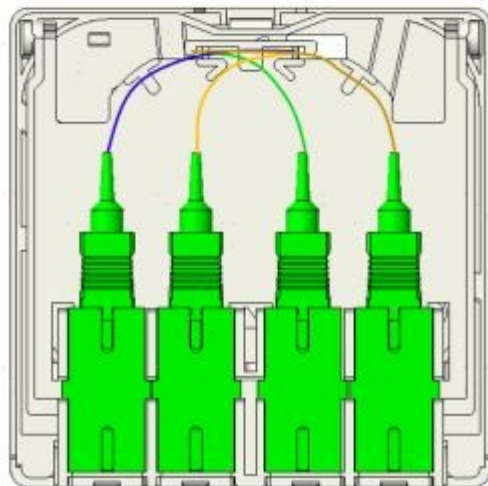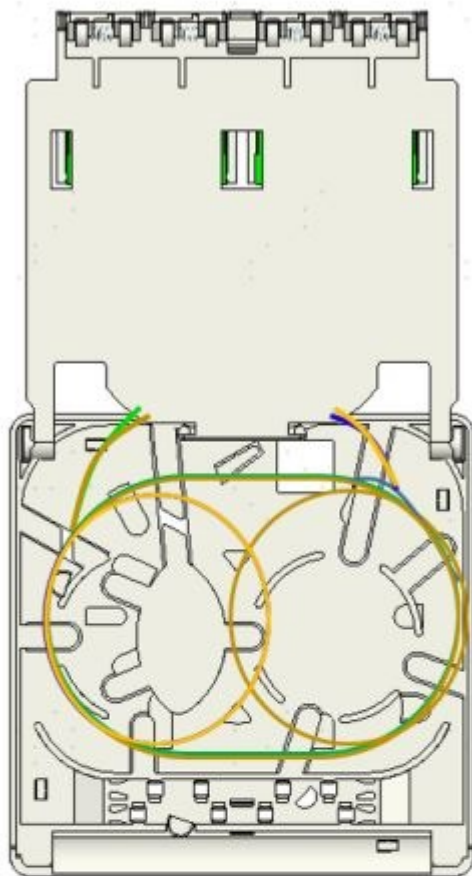

Backview of a double and single layer