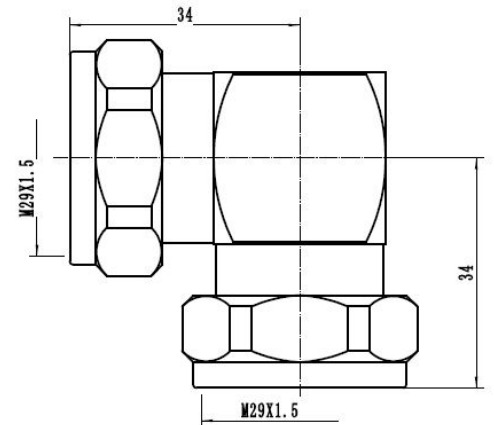


**716M-R-716M**

Coaxial Adapter 7-16 male - male, right angle

Coaxial Adapter, 7-16 Male / 7-16 Male,  
Right Angle

## FEATURES / BENEFITS

**Technical features****STRUCTURE**

Product Line		Coaxial Cable Components
Product Type		Coaxial Adapter

**MECHANICAL SPECIFICATIONS**

Connector A		7-16 DIN Male
Center Contact Connector A		Brass, silver plated
Outer Contact Connector A		Brass, CuSnZn plated
Connector B		7-16 DIN Angle Male
Center Contact Connector B		Brass, silver plated
Outer Contact Connector B		Brass, CuSnZn plated
Dielectric		PTFE
Sealing class		IP68, connected

**ELECTRICAL SPECIFICATIONS**

Frequency Range - MHz		DC - 6000
VSWR, Return Loss	VSWR (dB)	0 - 3000 MHz: 1.10 (26.4) 3000 - 6000 MHz: 1.15 (23.1)
Insertion Loss, dB (Max)	dB	0.1
3rd Order IM Product @ 2x20 Watts	dBc	-163
Power Rating	kW	1.5

**TEMPERATURE SPECIFICATIONS**

Operation Temperature	°C (°F)	-45 to 85 (-49 to 185)
-----------------------	---------	------------------------

**PACKAGING INFORMATION**

Package Quantity		1
------------------	--	---

External Document Links

Notes