



The novel side fed dipole design of these antennas provides 10 dBd omnidirectional gain with 60 MHz bandwidth. They feature constant beamtilt, heavy null fill, and have been VSWR tested. Depending upon the specific required area of coverage, horizontal patterns O, A, B, D or H are available.

FEATURES / BENEFITS

- High gain maximizes ERP.
- Heavy null fill enhances close-in coverage.
- Customized beamtilt minimizes interference to and from adjacent systems.
- Various patterns available to efficiently cover target area.
- S-Option 7/16 Connector



Technical features

ELECTRICAL SPECIFICATIONS

Horizontal Pattern		OmniDirectional
Frequency Range	MHz	746 - 806
Horizontal Beamwidth	deg	360
Electrical Downtilt	deg	0.75
Gain	dBi (dBd)	12.1
Vertical Beamwidth	deg	5
1st Null Fill	dB	Included
Null Fill	dB	Included
Front-To-Back Ratio	dB	Omni
Polarization		Vertical
VSWR		< 1.5:1
Bandwidth for 1.5:1 VSWR	MHz	< 1.5:1
Impedance	Ohms	50
Maximum Power Input	W	500
Lightning Protection		Top Rod Grounded to Base Mount

GENERAL SPECIFICATIONS

Antenna Type		Penetrator
---------------------	--	------------



BPS10S-O-B1


Penetrator™ Antenna, 746-806, 12.1dBi, 360deg

MECHANICAL SPECIFICATIONS

Connector Type		7/16 Female
Connector Location		Bottom
Weight	kg (lb)	26 (57)
Weight with B1 Bracket	kg (lb)	40 (89)
Mount Type		Bracket
Mounting Hardware		B1 Bracket (included)
Rated Wind Speed	km/h (mph)	200 (125)
Overall Length	m (ft)	4.26 (14)
Diameter	mm (in)	168.3 (6.625)
Radiating Element Material		Aluminum
Element Housing Material		Fiberglass
Mounting Hardware Material		B1 Bracket (included)
Max Wind Loading Area	m ² (ft ²)	0.480 (5.2)
Survival Wind Speed	km/h (mph)	200 (125)

PACKAGING INFORMATION

Shipping Weight	kg (lb)	38.7 (85)
-----------------	---------	-----------

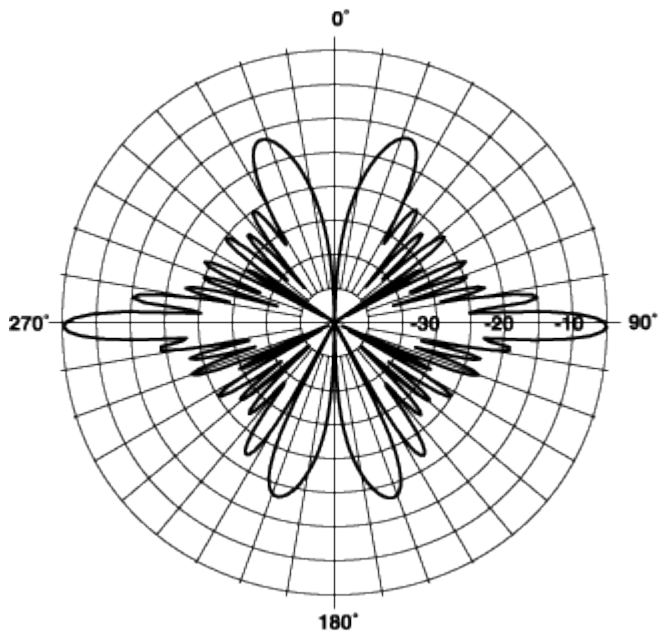


Vertical Pattern



BPS10S-O-B1

Penetrator™ Antenna, 746-806, 12.1dBi, 360deg

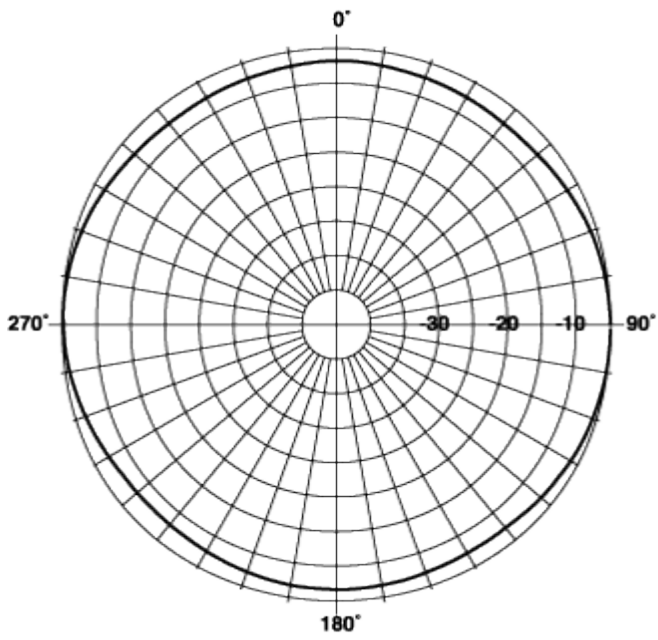

Horizontal Pattern

External Document Links

Notes

- Radiating patterns: [Request pattern files](#)