



RFS CDS*-43-617/3800-ECO series Directional Couplers have been designed for a variety of wireless applications in the frequency band from 617 to 3800MHz. The unit couples off a defined fraction of a RF signal from 5 to 30 dB with minimal reflections or loss. The broad frequency range is ideally suited for multi-band distributed antenna systems or in combination with RADIAFLEX® radiating cables.

FEATURES / BENEFITS

- 4.3-10-female interfaces
- PIM optimized design (160dBc @2x43dBm)
- Low insertion loss
- High power handling
- Small size, Low weight

**Technical features****STRUCTURE**

Product Type		Directional Coupler
Techn. Application		Outdoor
Number of Input Ports		1
Number of Output Ports		2

ELECTRICAL SPECIFICATIONS

Frequency Range	MHz	617 - 3800
Connector Type		4.3-10 female
Max. VSWR / Return Loss	VSWR/dB	1.30/17.7 (1.3)
Insertion Loss max.	dB	0.3
Coupling Value	dB	20
Coupling Flatness max.	dB	±0.044
Intermodulation (IM3)		-160dBc (2x43dBm)
Directivity min.	dB	20

Impedance	Ohm	50
Total Input Power	W	400

TEMPERATURE SPECIFICATIONS

Temperature Range	°C (°F)	-25 to +65 (-13 to +149)
-------------------	---------	--------------------------




MECHANICAL SPECIFICATIONS

Height	mm (in)	22 (0.866)
Width	mm (in)	40.4 (1.591)
Length	mm (in)	120 (4.724)
Weight	kg (lb)	0.33 (0.728)

TESTING AND ENVIRONMENTAL

Environmental Class		IP65
---------------------	--	------

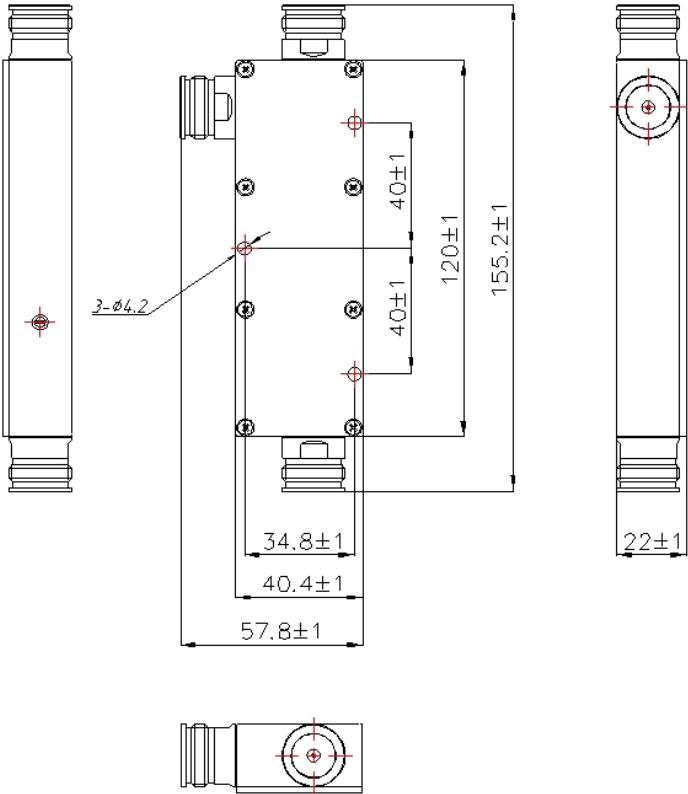

External Document Links

Notes