

These universal connector grounding kit provides a reliable ground connection to the connector body. Suitable for coaxial cable connectors from LCF 1/2" to 2-1/4" cable diameter.

Up to 2 grounding wires with 2.5 up to 25 mm^2 cross section or round conductor with max. diameter of 8mm can be connected.

FEATURES / BENEFITS

- Simple installation on site. No special tools required. All parts are loss proof pre-assembled.
- All componends are made of stainless steel. Suitable for outdoor installation.
- Compliant to RoHS (EU) and CRoHS (China). Usable on a global basis.



CEAR-12-214

External Document Links

Notes

Technical features

STRUCTURE


Product Line	Coaxial Cable Accessories		
Type of Grounding Kit	Universal connector grounding kit		
Transmission Line Type	LCF12, LCF78, UCF78, LCFS114, LCF158, LCF214		
Cable Type	Coaxial Foam Dielectric, Ultraflexible Coaxial Foam Dielectric		
Cable Size	1/2", 7/8", 1-1/4", 1-5/8", 2-1/4"		
Number of Cable / Waveguide Runs	1		
Material	Stainless Steel		

TEMPERATURE SPECIFICATIONS

Installation Temperature	°C (°F)	-50 to 85 (-58 to 185)
Operation Temperature	°C (°F)	-50 to 85 (-58 to 185)
Storage Temperature	°C (°F)	-50 to 85 (-58 to 185)

PACKAGING INFORMATION

Package Quantity	1	
Package Quantity		

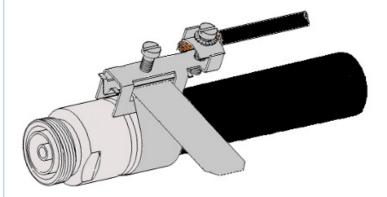

Instance of installation. The shown grounding wire is not included.

CEAR-12-214 REV : C REV DATE : 17 Apr 2013 **www.rfsworld.com**