




FDDV5015S4-1C

ShareLite™ 1427-1880 / 1920-2690 MHz Diplexer, with Full DC/AISG pass, Single configuration, 4.3-10 Connectors

The Sharelite FDDV Series of diplexers are designed to enable feeder sharing between systems in the 1427-1880 and in the 1920-2690 MHz ranges. RFS's innovative cavity filter design provides a very low insertion loss of 0.2dB typical while keeping the product extremely compact and lightweight. The usage of highly selective filters also guarantees a high isolation level of 50dB between ports, to ensure an interference-free environment for any technology deployed. The filter design also comprises of lightning protection for additional reliability. Designed to withstand the most severe outdoor environments, it also features an IP67 class protection with a vented enclosure to avoid any possible effects of condensation and pressure instability, thus providing a long lasting, extremely reliable solution to any network.

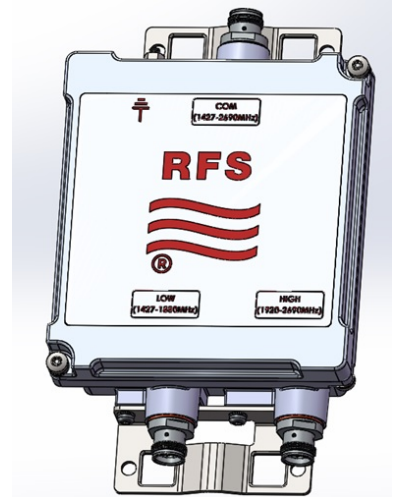

FEATURES / BENEFITS

- Single unit optimizing small cell and in-building applications
- Full DC pass
- 4.3-10 connectors - Reduce tower loading with connectors that are 40% smaller and lighter than 7/16 DIN connectors
- Extremely Low Insertion Loss
- High level of Rejection between bands - Protection against interference
- Extremely High Power Handling Capability
- Very compact & small size design - Easy installation and reduced tower load
- Exceptional reliability & environmental protection (IP-67)
- Mounting hardware for Wall and Pole mount provided (P/N SEM2-1A)
- Grounding already provided through the mounting bracket

Technical features

GENERAL SPECIFICATIONS

Product Type		Diplexer/Cross Band Combiner
Application		1500 L Band (LTE Band 32), GSM1800, LTE1800, UMTS, LTE2100, LTE2300, LTE2600
Configuration		Single indoor/outdoor

ELECTRICAL SPECIFICATIONS

Branch		1, 2	
Frequency Range	MHz	1427-1880	1920-2690
Impedance	Ohms	50, 50	
Frequency Band		1500 L Band (LTE Band 32), GSM1800, LTE1800, UMTS, LTE2100, LTE2300, LTE2600	
DC Pass		Full DC pass	
Insertion Loss	dB	0.2 typ./ 0.35 max, 0.2 typ./ 0.35 max	
GROUP DELAYS	ns	25 max., 25 max.	
Total Group Delay	ns	25 max., 25 max.	
Return Loss	dB	22 typ., 22 typ.	
Power Handling Continuous, Max.	W	600 at common port, 300 on each path	
Input Power, PEP	W	3000	
Rejection between bands	dB	50	
3rd Order PIM	dBm (dBc)	-118 (-161) @2x43 typ.	

TESTING AND ENVIRONMENTAL

Temperature Range	°C (°F)	-40 to 65 (-40 to 149)
Ingress Protection		IP 67
Environmental		ETSI 300-019-2-4 Class 4.1E
Lightning Protection		EN/IEC61000-4-5 Level 4



FDDV5015S4-1C


ShareLite™ 1427-1880 / 1920-2690 MHz Diplexer, with Full DC/AISG pass, Single configuration, 4.3-10 Connectors

MECHANICAL SPECIFICATIONS

RF Connectors		4.3-10 Female; 2 ports in, 1 port out
Shipping Weight	kg (lb)	2.7 (6)
Dimensions, H x W x D	mm (in)	191 x 172 x 70 (7.5 x 6.8 x 2.8)
Shipping Dimensions, H x W x D	mm (in)	191 x 172 x 70 (7.5 x 6.8 x 2.8)
Mounting		Wall Mounting: With 4 screws (maximum 6mm diameter) Pole Mounting: With included clamp set 38-127mm (1.50-5.0")

SELECTION TABLE

Type	Model Number	No DC pass	DC pass 1920-2690	DC pass 1427-1880	Full DC pass
Single	FDDV5015S4-1C				X
Single	FDDV5015S4-2C			X	
Single	FDDV5015S4-3C		X		
Single	FDDV5015S4-NC	X			

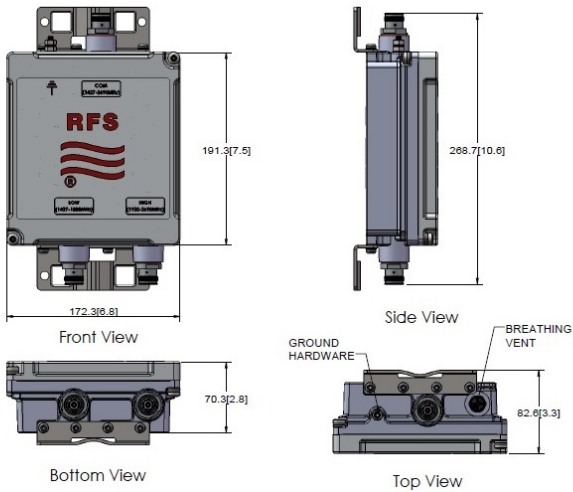

External Document Links

Notes