


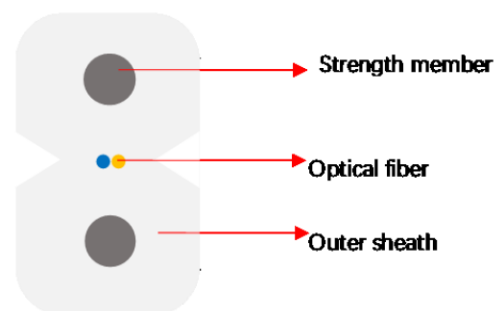

HYBRIFLEX fiber only, figure-8 aerial drop cable, 2 fiber, single mode with steel strength members, gel free, water blocking, LSZH, indoor cable. Optimized for Radio over Fiber (RoF) applications, for use within the RFS "Conventional" RoF solution.

**FEATURES / BENEFITS**

- Low-bend-sensitivity, Single Mode optical fiber provides ensuring future proof connectivity for RoF (and other) high bandwidth, multi wavelength applications
- Two parallel steel wire strength members ensure good performance of crush resistance to protect the fiber
- Novel flute design, easily strip and splice, simplify the installation and maintenance
- High quality raw material guarantees the long service life of cable
- Flame retardant, LSZH materials for use inside buildings

[External Document Links](#)[Notes](#)**Technical features****STRUCTURE**

Cable Type		Fiber optic cable
Fire Performance		Flame Retardant
Optical Fiber Color		Red/Green
Number of Fiber		2

**MECHANICAL SPECIFICATIONS**

Cable Weight	kg/m (lb/ft)	0.01 (0.007)
--------------	--------------	--------------

**CABLE JACKET**

UV-Protection Individual and External Jacket		Yes for External Jacket Only
Jacket Material		LSZH Black
Outer Diameter Nominal	mm (in)	3 (0.118)

**F/O CABLE SPECIFICATIONS**

F/O Cable Type		G657-A1 Single Mode, Bend Tolerant
Core/Clad	μm	9 /125
Secondary Protection Nominal	μm (in)	240 (0.009)
Single Bending Radius	mm (in)	10 (0.394)
F/O Standards (Meets or Exceeds)		ITU-T G657A1; RoHS Compliant
Fiber Attenuation	dB/km	Max: $\leq 0.37\text{dB/km}@ \lambda=1310\text{nm}$ & $\leq 0.24\text{dB/km} \lambda=1550\text{nm}$
Zero Dispersion Slope		$\leq 0.092 \text{ ps/km nm}^2$
Dispersion (1285 - 1340 nm)		-3.5 ~ 3.5ps/(nm km)
Mode Field Diameter (@ 1310 nm)		8.8
Cutoff wavelength cable		$\leq 1260 \text{ nm}$

**TESTING AND ENVIRONMENTAL**

Storage Temperature	°C (°F)	-40 to 70 (-40 to 158 )
Operation Temperature	°C (°F)	-30 to 70 (-22 to 158 )
Installation Temperature	°C (°F)	-10 to 60 (14 to 140 )
LSZH Specification		IEC 60332-1