

**GKIT60-U**Universal Grounding Kit, Adjustable Copper Strap, 3/8" to 3" for CELLFLEX<sup>®</sup>, Hybriflex<sup>®</sup> and Waveguide<sup>®</sup>


The Universal Ground Kit is specifically designed to accommodate a broad range of transmission line sizes, thus reducing inventory costs as well as eliminating errors due to incorrectly defined line sizes. The Universal Ground Kit is designed to comply with MIL-STD-188-124A and to withstand an excess of 200kA. The copper strap and associated hardware facilitates a proper attachment to the coaxial cable. The 6-gauge, 7 strand copper wire provides the most practical and effective low-inductance transfer of lightning induced current from your coax to your system ground. Installation of ground kits is recommended at the top and bottom of each vertical run, at 200 ft. increments and just prior to building entry. Sizing of the ground strap is accomplished by selecting the correct transmission line size from the chart, and removing the excess material above the corresponding letter (at scribed line).

**FEATURES / BENEFITS**

- Compatible with both copper and aluminium cable types. One Grounding Kit for both outer conductor materials eliminates the risk of faulty Grounding Kit installation and helps to keep inventory down.
- The Universal Ground Kit is designed to comply with MIL-STD-188-124A and to withstand an excess of 200kA.
- The copper wire provides the most practical and effective low inductance transfer of lightning induced current to ground.
- No influence on the electrical transmission characteristics of the Coaxial Cable, Hybriflex Cable and Waveguide.
- Compliant to RoHS (EU 2002/95/EC) and CRoHS (China SJ/T11363-2006) i.e. usable on a global basis.



GKIT60-U

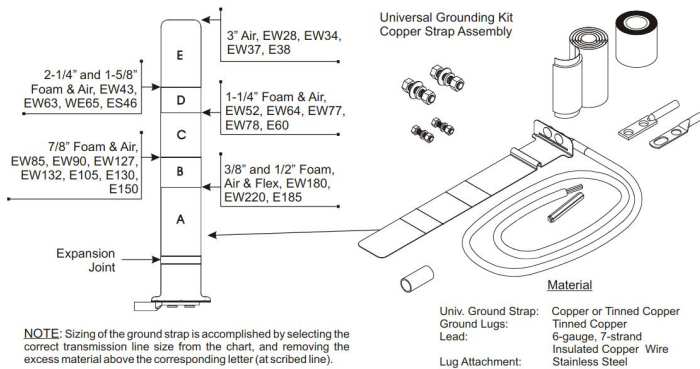**External Document Links****Notes****TYPICAL APPLICATIONS**

Installation Instruction

**Technical features****STRUCTURE**


Product Line		Cellflex, Hybriflex, Waveguide Cable Accessories
Type of Grounding Kit		Universal Adjustable Copper Strap
Transmission Line Type		3/8" to 3", Cellflex, Hybriflex, Waveguide
Cable Type		Cellflex, Hybriflex, Waveguide
Cable Size		3/8" to 3"

**GKIT60-U**Universal Grounding Kit, Adjustable Copper Strap, 3/8" to 3" for CELLFLEX<sup>®</sup>, Hybriflex<sup>®</sup> and Waveguide<sup>®</sup>**MECHANICAL SPECIFICATIONS**

Lug Attachment Method		Factory Attached
Lug Style Size		unattached 1/4in and 3/8in two-hole lugs
Grounding Wire Length	m (in)	1.5 (60)
Grounding Wire Size	mm <sup>2</sup>	16mm <sup>2</sup> (7 strand)
Grounding Wire Color		Black
Grounding Body Color		Black
Sealing Class		IP68

**PACKAGING INFORMATION**

Package Quantity		1
Weight per piece	kg (lb)	0.9 (1.98)

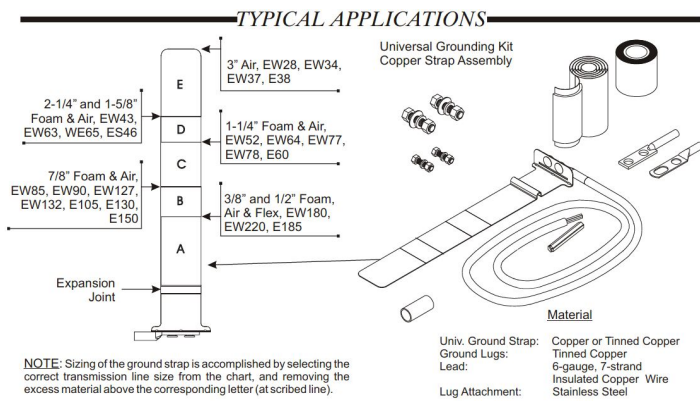

GKIT60-U Applications