


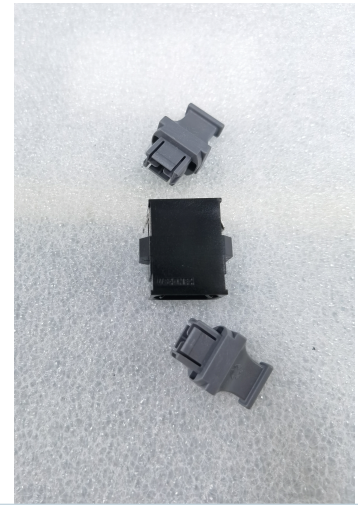

Compact MTP/MPO adapter with reduced flange. This adapter enables up to 12 backbone fibers to be connected to span connect and/or breakout cables without the need for additional protection in wall boxes or enclosures. The connection point for the MTP cables can be made simply within wall, floor or ceiling voids.

**FEATURES / BENEFITS**[External Document Links](#)[Notes](#)

## Technical features

**GENERAL SPECIFICATIONS**

Product Type		Hybriflex Adapter
--------------	--	-------------------

**MECHANICAL SPECIFICATIONS**

Material		Polyetherimide
----------	--	----------------

**TESTING AND ENVIRONMENTAL**

Operation Temperature	°C (°F)	-10 to 55 (14 to 131 )
-----------------------	---------	------------------------

**F/O CABLE SPECIFICATIONS**

Insertion Loss		$\leq 0.3\text{dB}$
Repeatatability / durability		$\leq 0.3\text{dB}$ for 500 mate/de-mate cycles
Standard		IEC 61754-7 and TIA 604-5 Type MPO