




**RFS' HYBRIFLEX™** cabling solution for Remote Radio Unit (RRU) combines optical fiber and DC power for RRUs in a single lightweight aluminum corrugated cable, making it the world's most innovative solution for RRH deployments. It was developed to reduce installation complexity and cost at Cellular sites.

**HYBRIFLEX™** cabling solutions allows mobile operators deploying RRU architecture to standardize RRU installation process and eliminates the need for and the cost of cable grounding.

The **HYBRIFLEX™** LC Patch cord is part of the cabling solution for Remote Radio Units. It connects the patch panel to the Baseband Unit (BBU) in the bottom shelter

**FEATURES / BENEFITS**

- LC Patchcords

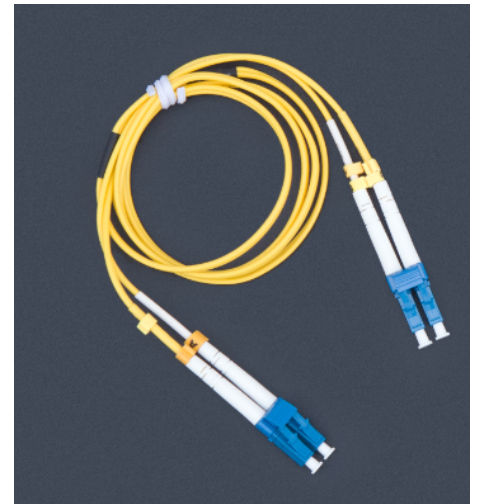

External Document Links

Notes

**Technical features**

**STRUCTURE**

Cable Type		Fiber Patchcord
Length	m (ft)	1 (3.28)

**F/O CABLE SPECIFICATIONS**

F/O Cable Type		Single Mode
Number of F/O Pairs		1
Core/Clad	µm	9 /125
Fiber Termination End 1		LC Duplex Connector
Fiber Termination End 2		LC Duplex Connector

**TESTING AND ENVIRONMENTAL**

Storage Temperature	°C (°F)	-40 to 70 (-40 to 158 )
Operation Temperature	°C (°F)	-40 to 70 (-40 to 158 )
Installation Temperature	°C (°F)	-20 to 50 (-4 to 140 )