




RFS' HYBRIFLEX™ cabling solution for Remote Radio Unit (RRU) combines optical fiber and DC power for RRUs in a single lightweight aluminum corrugated cable, making it the world's most innovative solution for RRH deployments. It was developed to reduce installation complexity and cost at Cellular sites.

HYBRIFLEX™ cabling solutions allows mobile operators deploying RRU architecture to standardize RRU installation process and eliminates the need for and the cost of cable grounding.

The HYBRIFLEX™ LC Patch cord is part of the cabling solution for Remote Radio Units. It connects the patch panel to the Baseband Unit (BBU) in the bottom shelter

FEATURES / BENEFITS

- LC Patchcords

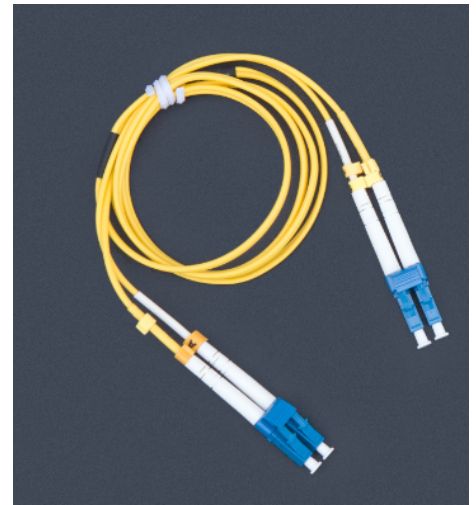

### Technical features

#### STRUCTURE

Cable Type		Fiber Patchcord
Length	m (ft)	1 (3.28)

#### F/O CABLE SPECIFICATIONS

F/O Cable Type		Single Mode
Number of F/O Pairs		1
Core/Clad	μm	9 /125
Fiber Termination End 1		LC Duplex Connector
Fiber Termination End 2		LC Duplex Connector

#### TESTING AND ENVIRONMENTAL

Storage Temperature	°C (°F)	-40 to 70 (-40 to 158 )
Operation Temperature	°C (°F)	-40 to 70 (-40 to 158 )
Installation Temperature	°C (°F)	-20 to 50 (-4 to 140 )

External Document Links

Notes