




PRODUCT DESCRIPTION

RFS' HYBRIFLEX Remote Radio Head (RRH) hybrid feeder cabling solution combines optical fiber and DC power for RRHs in a single lightweight aluminum corrugated cable, making it the world's most innovative solution for RRH deployments. It was developed to reduce installation complexity and costs at Cellular sites.

HYBRIFLEX allows mobile operators deploying an RRH architecture to standardize the RRH installation process. HYBRIFLEX combines optical fiber (multi-mode or single-mode) and power in a single corrugated cable. It may eliminate the need for junction boxes as well as works in conjunction with and can connect multiple RRHs with a single feeder. Standard RFS CELLFLEX® accessories can be used with HYBRIFLEX cable. Both pre-connectorized and on-site options are available.

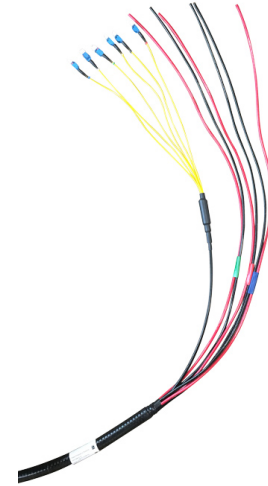

FEATURES / BENEFITS

- Aluminum corrugated armor with outstanding bending characteristics – Minimizes installation time and enables mechanical protection and shielding
- Same accessories as 7/8" coaxial cable
- Outer conductor grounding – Utilizes same grounding methods as coaxial cable
- Lightweight solution and compact design – Decreases tower loading
- Robust cabling – Eliminates need for expensive cable trays and ducts
- Installation of tight bundled fiber optic cable pairs directly to the RRH – Reduces CAPEX and wind load by eliminating need for interconnection
- Optical fiber and power cables housed in single corrugated cable – Saves CAPEX by standardizing RRH cable installation and reducing installation requirements
- Outdoor, black PE jacket – Ensures long-lasting cable protection

TECHNICAL FEATURES

STRUCTURE

| | | |
|-------------------|--------|------------|
| Cable Type | | HYBRIFLEX® |
| Size | | 7/8" |
| Length | m (ft) | 76.2 (250) |

MECHANICAL SPECIFICATIONS

| | | |
|---|--------------|--------------------|
| Outer Diameter Nominal | mm (in) | 28.2 (1.11) |
| Cable Weight | kg/m (lb/ft) | 1.79 (1.2) |
| Minimum Bending Radius, Single Bend | mm (in) | 125 (5) |
| Minimum Bending Radius, Multiple Bends | mm (in) | 254 (10) |
| Recommended / Maximum Clamp Spacing | m (ft) | 1 / 1.2 (3.25 / 4) |

ARMOR SPECIFICATIONS

| | | |
|---------------------------------------|--------------|---------------------|
| Armor Type | | Corrugated Aluminum |
| Maximum DC-Resistance of Armor | Ω/km (Ω/kft) | 1.05 (0.32) |
| Diameter Corrugated Armor | mm (in) | 25.4 (0.99) |



CABLE JACKET

| | | |
|--|--|------------------------------|
| UV-Protection Individual and External Jacket | | Yes |
| Jacket Material | | Outdoor, Polyethylene, Black |

DC POWER CABLE SPECIFICATIONS

| | | |
|-----------------------------------|-----------------------|---|
| Number of DC Pairs | | 3 |
| Maximum DC-Resistance Power Cable | Ω/km (Ω/kft) | 1.4 (0.42) |
| Cross Section of Power Cable | mm ² (AWG) | 13.3 (6) |
| DC Wire Jacket Material | | PVC/Nylon |
| DC Cable Single Bending Radius | mm (in) | 83 (3.3) |
| DC Cable Diameter | mm (in) | 6.45 (0.25) |
| DC Standards (Meets or Exceeds) | | For use in Type MC per UL 1569, PVC Nylon, RoHS/REACH Compliant |
| Break-out Length (Top) | mm (in) | 609 (24) |
| Break-out Length (Bottom) | mm (in) | 1016 (40) |

F/O CABLE SPECIFICATIONS

| | | |
|----------------------------------|---------|--|
| F/O Cable Type | | G657-A1 Single Mode, Bend Tolerant |
| Number of F/O Pairs | | 6 |
| Core/Clad | μm | 9/125 |
| Secondary Protection Nominal | μm (in) | 900 (0.035) |
| Single Bending Radius | mm (in) | 83 (3.3) |
| F/O Standards (Meets or Exceeds) | | UL Listed Type OFNR (UL1666), RoHS Compliant |
| Optical Loss | dB/Km | 0.5 @ 1310 nm 0.5 @ 1550 nm |
| Fiber Termination End 1 | | DLC connector |
| Fiber Termination End 2 | | DLC connector |
| FO Break-out Length (Top) | mm (in) | 889 (35) |
| FO Break-out Length (Bottom) | mm (in) | 1016 (40) |

TESTING AND ENVIRONMENTAL

| | | |
|--------------------------|---------|------------------------|
| Storage Temperature | °C (°F) | -40 to 70 (-40 to 158) |
| Operation Temperature | °C (°F) | -40 to 65 (-40 to 149) |
| Installation Temperature | °C (°F) | -20 to 65 (-4 to 149) |



HB078-13U3S6-250J

HYBRIFLEX® Hybrid Feeder Cabling Solution 3x6, 7/8", 3 pair 6AWG, 6 pair Single-Mode Fiber, DLC to DLC Connectors, 250 ft



EXTERNAL DOCUMENT LINKS

Installation Guidelines: [Download](#)

On-line Factory Test Results: [View](#)

NOTES

Nominal length equals length of trunk not including top and bottom breakouts; breakout lengths add additionally to the total assembly length tip to tip.

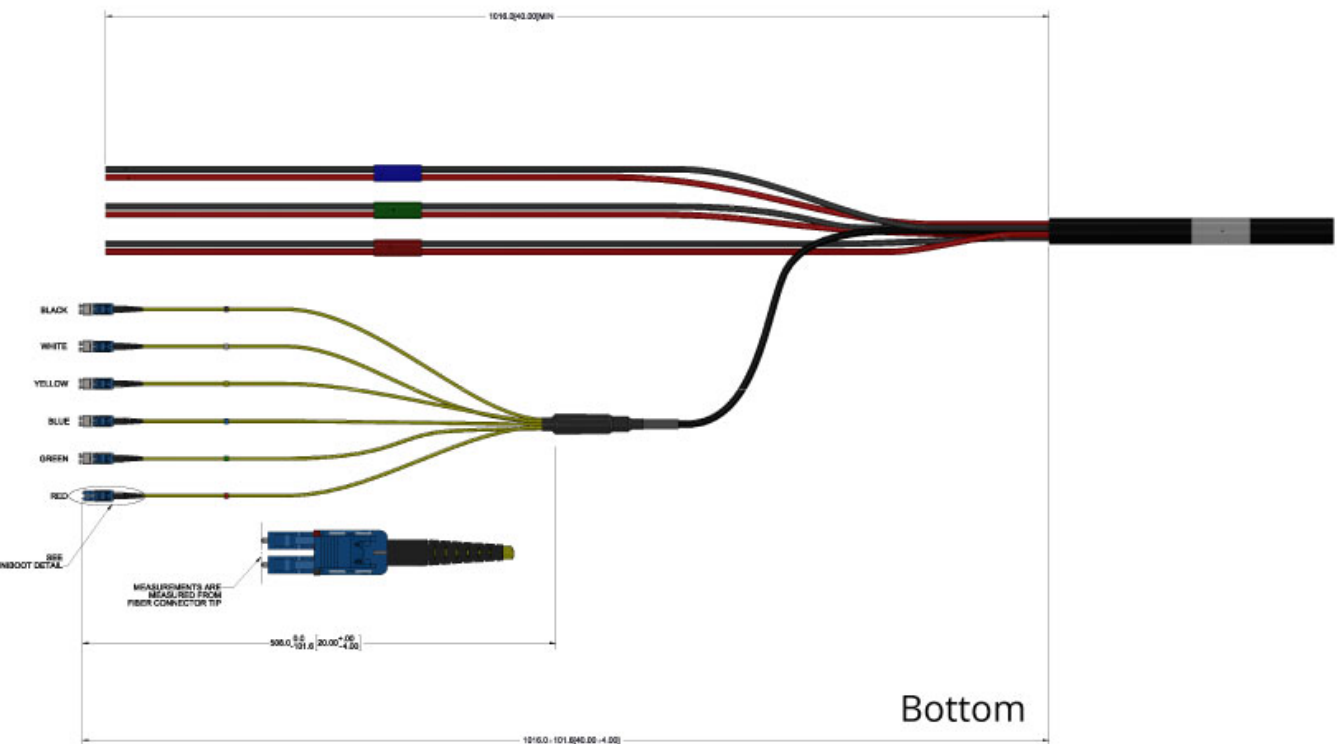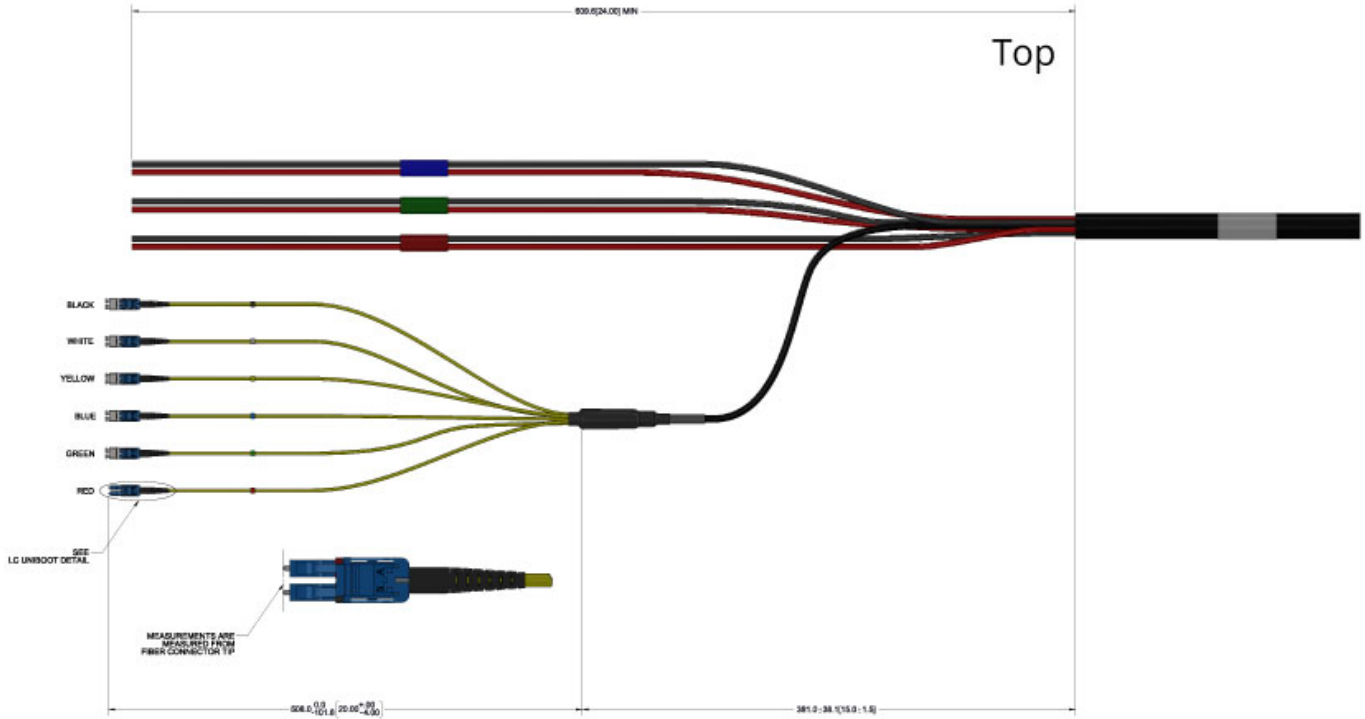



HB078-13U3S6-250J

HYBRIFLEX® Hybrid Feeder Cabling Solution 3x6, 7/8", 3 pair 6AWG, 6 pair Single-Mode Fiber, DLC to DLC Connectors, 250 ft

ADDITIONAL ASSEMBLY LENGTHS

| Length (ft) | Model Number |
|-------------|-------------------|
| 10 | HB078-13U3S6-10J |
| 20 | HB078-13U3S6-20J |
| 30 | HB078-13U3S6-30J |
| 40 | HB078-13U3S6-40J |
| 50 | HB078-13U3S6-50J |
| 60 | HB078-13U3S6-60J |
| 70 | HB078-13U3S6-70J |
| 80 | HB078-13U3S6-80J |
| 90 | HB078-13U3S6-90J |
| 100 | HB078-13U3S6-100J |
| 110 | HB078-13U3S6-110J |
| 120 | HB078-13U3S6-120J |
| 130 | HB078-13U3S6-130J |
| 140 | HB078-13U3S6-140J |
| 150 | HB078-13U3S6-150J |
| 160 | HB078-13U3S6-160J |

ADDITIONAL ASSEMBLY LENGTHS

| Length (ft) | Model Number |
|-------------|-------------------|
| 170 | HB078-13U3S6-170J |
| 180 | HB078-13U3S6-180J |
| 190 | HB078-13U3S6-190J |
| 200 | HB078-13U3S6-200J |
| 210 | HB078-13U3S6-210J |
| 220 | HB078-13U3S6-220J |
| 230 | HB078-13U3S6-230J |
| 240 | HB078-13U3S6-240J |
| 250 | HB078-13U3S6-250J |
| 260 | HB078-13U3S6-260J |
| 270 | HB078-13U3S6-270J |
| 280 | HB078-13U3S6-280J |
| 290 | HB078-13U3S6-290J |
| 300 | HB078-13U3S6-300J |