



• Hangers for the installation of HELIFLEX<sup>®</sup> cables on different supporting profiles.

Cable Clamp and Extended Counterbed hot-galvanized steel

Screw: stainless steel.

#### FEATURES / BENEFITS



picture shows the 1L4 version  
for illustration purpose only

#### External Document Links

#### Notes

Hangers for anchor bar 18-22 mm (0.71-0.87")

## Technical features

### GENERAL SPECIFICATIONS

Product Line		Coaxial Cable Accessories
Product Type		Hanger
Hanger Type		Anchor bar 18-22mm (0.71-0.87")
Transmission Line Type		HCA495
Cable Type		Air Dielectric

### MECHANICAL SPECIFICATIONS

Cable Size		5
Material		Cable Clamp : hot-dip galvanized Extended Counterbed : hot-dip galvanized Screw: Stainless steel
Recommended / Maximum Clamp Spacing	m (ft)	1 / 2 (3.3 / 6.6)

### TEMPERATURE SPECIFICATIONS


Operation Temperature	°C (°F)	-50 to 85 (-58 to 185 )
Storage Temperature	°C (°F)	-50 to 85 (-58 to 185 )

### PACKAGING INFORMATION


Package Quantity		1
------------------	--	---

## HCH-495-1C

Cable hanger for HELIFLEX® Air-dielectric coaxial cable

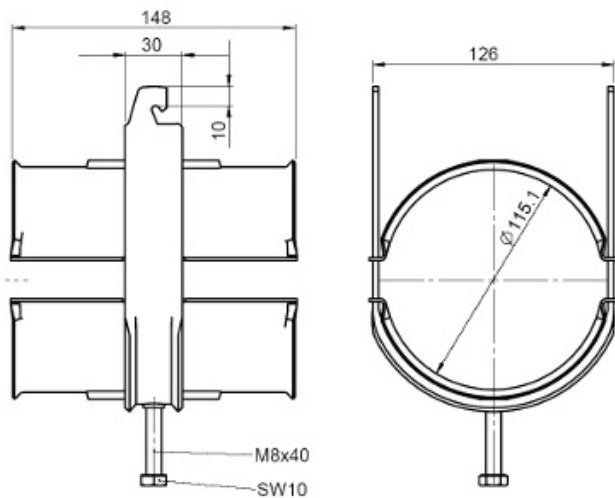

### HCH Clamps available for different types of interfaces:




#### Type C

For anchor bar  
(18-22mm slot)



#### Type L

For angle iron  
(in different sizes)



#### Type R

For flat iron  
(6 – 12 mm)