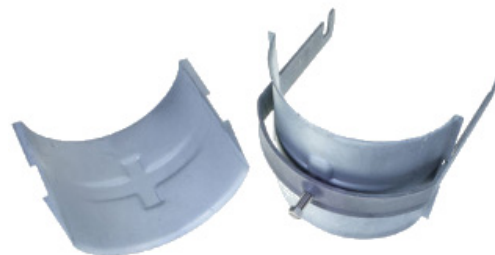


**HCH-618-1C**Cable hanger for HELIFLEX[®] Air-dielectric coaxial cable

• Hangers for the installation of HELIFLEX[®] cables on different supporting profiles.

Cable Clamp and Extended Counterbed hot-galvanized steel

Screw: stainless steel.

FEATURES / BENEFITS

picture shows the 1L4 version
for illustration purpose only

External Document Links**Notes**

Hangers for anchor bar 18-22 mm (0.71-0.87")

Technical features**GENERAL SPECIFICATIONS**

Product Line		Coaxial Cable Accessories
Product Type		Hanger
Hanger Type		Anchor bar 18-22mm (0.71-0.87")
Transmission Line Type		HCA618
Cable Type		Air Dielectric

MECHANICAL SPECIFICATIONS

Cable Size		6-1/8
Material		Cable Clamp : hot-dip galvanized Extended Counterbed : hot-dip galvanized Screw: Stainless steel
Recommended / Maximum Clamp Spacing	m (ft)	1 / 2 (3.3 / 6.6)

TEMPERATURE SPECIFICATIONS

Operation Temperature	°C (°F)	-50 to 85 (-58 to 185)
Storage Temperature	°C (°F)	-50 to 85 (-58 to 185)


PACKAGING INFORMATION

Package Quantity		1
------------------	--	---




HCH-618-1C

Cable hanger for HELIFLEX[®] Air-dielectric coaxial cable

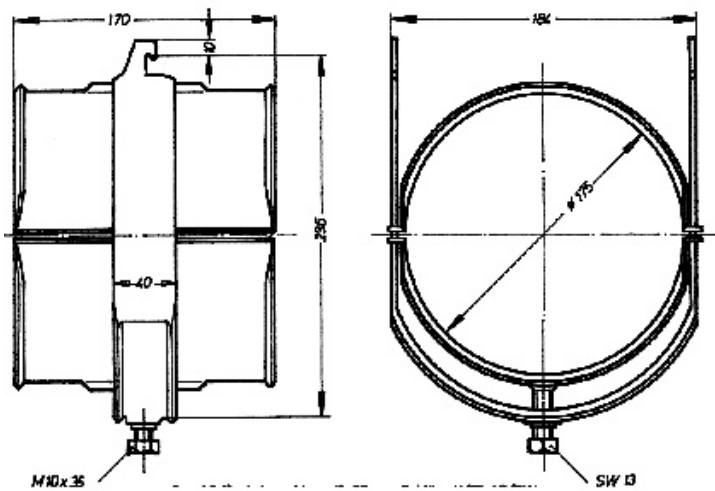

HCH Clamps available for different types of interfaces:




Type C

For anchor bar
(18-22mm slot)



Type L

For angle iron
(in different sizes)



Type R

For flat iron
(6 – 12 mm)