



Radio Frequency Systems' CELLFLEX® Factory-Fit Jumpers feature specially designed connectors which are soldered-on in a strictly controlled industrial process to ensure industry leading performance for today's high-performance wireless systems. The connector design and manufacturing process has been optimized to produce premium VSWR and IM levels. Injection molded boots provide reliable and repeatable additional sealing level and strain relief. Our facilities produce and stock all popular lengths as required by the industry, and can deliver custom lengths with premium VSWR and IM levels on request.



43M43MRS14-0100FFP for EXAMPLE

**FEATURES / BENEFITS**

- **Stable premium VSWR, outstanding and consistent intermodulation performance - 4.3-10 side not relying on coupling torque**  
Improves network performance, reduces the number of dropped calls and avoids revenue loss.
- **Waterproof to IP 68**  
No downtime risk, secures revenue.
- **Smaller connector footprint for 4.3-10**  
Enables tighter spacing of connections for antennas and RRHs.
- **Available with standard ""J"" or flame retardant ""JFN"" jacket types**  
Usable in all applications.
- **Compliant to RoHS (EU) and CRoHS (China)**  
Usable on a global basis.

**Technical features**

**STRUCTURE**

Cable Type		1/4" Superflexible Foam
Jumper Type		Factory-Fit (Premium)
Dielectric		PTFE
Gasket		Silicone rubber
Jacket		JFN: halogen free, non corrosive, flame retardant, low smoke, polyolefin, Test methods for fire behaviour of cable: IEC 60754-1/-2 halogen free and non corrosive, IEC 61034 low smoke emission, IEC 60332-1 flame retardant

**MECHANICAL SPECIFICATIONS**

Minimum Bend Radius	mm (in)	25 (0.98)
---------------------	---------	-----------

**TESTING AND ENVIRONMENTAL**

Sealing class		IP68
---------------	--	------

**TEMPERATURE SPECIFICATIONS**

Installation Temperature	°C (°F)	-25 to 60 (-13 to 140 )
Operation Temperature	°C (°F)	-50 to 85 (-58 to 185 )
Storage Temperature	°C (°F)	-70 to 85 (-94 to 185 )

**ELECTRICAL SPECIFICATIONS**

Intermodulation, 3rd Order	dBc	≤ -159 static & dynamic (-161 typical)
----------------------------	-----	--

**JUMPER VSWR 0 - 10 M**

Frequency [MHz]	Straight / Straight [dB] (VSWR)	Right Angle / Right Angle [dB] (VSWR)
0 - 1000	>28.0 (≤1.08)	>28.0 (≤1.08)
>1000-1700	>28.0 (≤1.08)	>26.4 (≤1.10)
>1700-2200	>28.0 (≤1.08)	>26.4 (≤1.10)
>2200-2700	>26.4 (≤1.10)	>24.9 (≤1.12)
>2700-3800	>23.1 (≤1.15)	>20.8 (≤1.20)



**JUMPER-S14F-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 1/4" Superflexible Foam, with flame retardant jacket

>3800-5000	>20.8 (≤1.20)	>19.1 (≤1.25)
>5000-6000	>17.7 (≤1.30)	>17.7 (≤1.30)

**JUMPER VSWR 10 - 20 M**

Frequency [MHz]	Straight / Straight [dB] (VSWR)	Right Angle / Right Angle [dB] (VSWR)
0 - 1000	>28.0 (≤1.08)	>28.0 (≤1.08)
>1000-1700	>26.4 (≤1.10)	>24.0 (≤1.14)
>1700-2200	>26.4 (≤1.10)	>24.0 (≤1.14)
>2200-2700	>24.9 (≤1.12)	>24.0 (≤1.14)
>2700-3800	>23.1 (≤1.15)	>19.1 (≤1.25)
>3800-5000	>19.1 (≤1.25)	>18.2 (≤1.28)
>5000-6000	>17.7 (≤1.30)	>16.0 (≤1.38)

**COMBINATIONS**

Model Name	Connector 1	Connector 2
7M7MS14F-XXXXFFP	7-16 Male	7-16 Male
7M7FS14F-XXXXFFP	7-16 Male	7-16 Female
7M7MRS14F-XXXXFFP	7-16 Male	7-16 Male Right Angle
7M43MS14F-XXXXFFP	7-16 Male	4.3-10 Male
7M43FS14F-XXXXFFP	7-16 Male	4.3-10 Female
7M43MRS14F-XXXXFFP	7-16 Male	4.3-10 Male Right Angle
7MNMS14F-XXXXFFP	7-16 Male	N-Male
7MNFS14F-XXXXFFP	7-16 Male	N-Female
7MNMRS14F-XXXXFFP	7-16 Male	N-Male Right Angle
7F7FS14F-XXXXFFP	7-16 Female	7-16 Female
7F7MRS14F-XXXXFFP	7-16 Female	7-16 Male Right Angle
7F43MS14F-XXXXFFP	7-16 Female	4.3-10 Male
7F43FS14F-XXXXFFP	7-16 Female	4.3-10 Female
7F43MRS14F-XXXXFFP	7-16 Female	4.3-10 Male Right Angle
7FNMS14F-XXXXFFP	7-16 Female	N-Male
7FNFS14F-XXXXFFP	7-16 Female	N-Female
7FNMRS14F-XXXXFFP	7-16 Female	N-Male Right Angle
7MR7MRS14F-XXXXFFP	7-16 Male Right Angle	7-16 Male Right Angle
7MR43MS14F-XXXXFFP	7-16 Male Right Angle	4.3-10 Male
7MR43FS14F-XXXXFFP	7-16 Male Right Angle	4.3-10 Female
7MR43MRS14F-XXXXFFP	7-16 Male Right Angle	4.3-10 Male Right Angle
7MRNMS14F-XXXXFFP	7-16 Male Right Angle	N-Male
7MRNFS14F-XXXXFFP	7-16 Male Right Angle	N-Female
7MRNMRS14F-XXXXFFP	7-16 Male Right Angle	N-Male Right Angle
43M43MS14F-XXXXFFP	4.3-10 Male	4.3-10 Male
43M43FS14F-XXXXFFP	4.3-10 Male	4.3-10 Female
43M43MRS14F-XXXXFFP	4.3-10 Male	4.3-10 Male Right Angle
43MNMS14F-XXXXFFP	4.3-10 Male	N-Male
43MNFS14F-XXXXFFP	4.3-10 Male	N-Female



**JUMPER-S14F-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 1/4" Superflexible Foam, with flame retardant jacket


43MNMRS14F-XXXXFFP	4.3-10 Male	N-Male Right Angle
43F43FS14F-XXXXFFP	4.3-10 Female	4.3-10 Female
43F43MRS14F-XXXXFFP	4.3-10 Female	4.3-10 Male Right Angle
43FNMS14F-XXXXFFP	4.3-10 Female	N-Male
43FNFS14F-XXXXFFP	4.3-10 Female	N-Female
43FNMRS14F-XXXXFFP	4.3-10 Female	N-Male Right Angle
43MR43MRS14F-XXXXFFP	4.3-10 Male Right Angle	4.3-10 Male Right Angle
43MRNMS14F-XXXXFFP	4.3-10 Male Right Angle	N-Male
43MRNFS14F-XXXXFFP	4.3-10 Male Right Angle	N-Female
43MRNMRS14F-XXXXFFP	4.3-10 Male Right Angle	N-Male Right Angle
NMNMS14F-XXXXFFP	N-Male	N-Male
NMNFS14F-XXXXFFP	N-Male	N-Female
NMNMRS14F-XXXXFFP	N-Male	N-Male Right Angle
NFNFS14F-XXXXFFP	N-Female	N-Female
NFNMRS14F-XXXXFFP	N-Female	N-Male Right Angle
NMRNMRS14F-XXXXFFP	N-Male Right Angle	N-Male Right Angle
43MNXMS14F-XXXXFFP	4.3-10 Male	NEX10-Male
NMNXMS14F-XXXXFFP	N-Male	NEX10-Male
NFNXMS14F-XXXXFFP	N-Female	NEX10-Male
43FNXMS14F-XXXXFFP	4.3-10 Female	NEX10-Male
43MHNXMPS14F-XXXXFFP	4.3-10 Male	NEX10 Male Push/Pull
43M43MHS14F-XXXXFFP	4.3-10 Male	4.3-10 Male Handscrew
43MH43FS14F-XXXXFFP	4.3-10 Male Handscrew	4.3-10 Female
43MHNFS14F-XXXXFFP	4.3-10 Male Handscrew	N-Female
43MHNMS14F-XXXXFFP	4.3-10 Male Handscrew	N-Male
43MH43MRS14F-XXXXFFP	4.3-10 Male Handscrew	4.3-10 Male Right Angle
7MR43MHS14F-XXXXFFP	7-16 Male Right Angle	4.3-10 Male Handscrew
7M43MHS14F-XXXXFFP	7-16 Male	4.3-10 Male Handscrew
7F43MHS14F-XXXXFFP	7-16 Female	4.3-10 Male Handscrew
43MHNXMS14F-XXXXFFP	4.3-10 Male Handscrew	NEX10 Male
43MNXMPS14F-XXXXFFP	4.3-10 Male	NEX10 Male Push/Pull
7MRNXMPS14F-XXXXFFP	7-16 Male Right Angle	NEX10 Male Push/Pull
7MNXMPS14F-XXXXFFP	7-16 Male	NEX10 Male Push/Pull
7FNXMPS14F-XXXXFFP	7-16 Female	NEX10 Male Push/Pull
43FNXMPS14F-XXXXFFP	4.3-10 Female	NEX10 Male Push/Pull
NFNXMPS14F-XXXXFFP	N-Female	NEX10 Male Push/Pull
NMNXMPS14F-XXXXFFP	N-Male	NEX10 Male Push/Pull
XXXX in the model name is the length; as well for jumper with boots acc. to nomenclature		



# JUMPER-S14F-FFP

CELLFLEX® Factory-Fit Jumper Assembly, 1/4" Superflexible Foam, with flame retardant jacket

## RFS JUMPER MODEL NOMENCLATURE

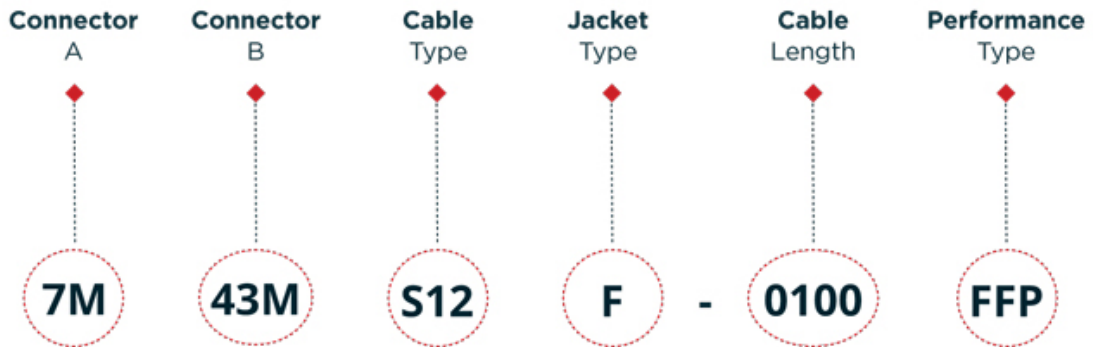

**7M & 43M CONNECTORS A & B**

<b>7M</b>	7-16 Male
<b>7F</b>	7-16 Female
<b>7MR</b>	7-16 Male Right Angle
<b>43M</b>	4.3-10 Male
<b>43F</b>	4.3-10 Female
<b>43MH</b>	4.3-10 Male Handscrew
<b>43MP</b>	4.3-10 Male Push Pull
<b>43MR</b>	4.3-10 Male Right Angle
<b>NM</b>	N-Type Male
<b>NF</b>	N-Type Female
<b>NMR</b>	N-Type Male Right Angle
<b>NXM</b>	NEX10 Male
<b>NXMP</b>	NEX10 Male Push Pull
<b>7MB</b>	7-16 Male with Weatherboots
<b>43MB</b>	4.3-10 Male with Weatherboots
<b>NMB</b>	N-Type Male with Weatherboots

**S12 CABLE TYPE**

<b>L38</b>	3/8" Low Loss Coax
<b>L12</b>	1/2" Low Loss Coax
<b>S14</b>	1/4" Superflexible Coax
<b>S38</b>	3/8" Superflexible Coax
<b>S12</b>	1/2" Superflexible Coax

**F JACKET TYPE**

<b>F</b>	JFN Flame Retardant
<b>Blank</b>	PE

**0100 CABLE LENGTH\***

<b>0100</b>	1 meter
<b>0200</b>	2 meter
<b>0250</b>	2.5 meter
<b>1000</b>	10 meter
<b>1500</b>	15 meter
<b>030</b>	3 feet
<b>060</b>	6 feet
<b>100</b>	10 feet
<b>150</b>	15 feet
<b>200</b>	20 feet

**FFP JUMPER PERFORMANCE**

<b>FFP</b>	Factory-Fit Premium
<b>FFPB</b>	Factory-Fit Premium; Bird-Proof Option
<b>FFS</b>	Factory-Fit Standard
<b>UPM</b>	Ultra PIM Performance

**NOTES:**  
 \* 4 digits indicate meter length, 3 digits indicate feet length  
 Others lengths available on request

**External Document Links**  
[Cable SCF14-50JFN](#)  
[Handling instruction](#)  
[Jumper Brochure](#)

Notes