Single Multi-block hanger one layer, with angle member adapter

Single Multi block hanger support systems are designed for organizing bundled runs of coax cable.

Each space-saving block securely holds one run of coax, allowing a compact bundle of up to 3x runs to be supported by stacking three blocks.

## FEATURES / BENEFITS

- Single Multi Blocks are manufactured of polypropylene providing thermal, chemical and UV resistance in all environments.
- They come including angle member adapter and necessary hardware.
- The angle member adapter fastens the clamp to the tower without drilling.
- The angle member adapter includes a tower member set screw.
- The hanger mounting rod may be located in either of two mounting holes, depending on orientation of the fixing member.
- Compliant to RoHS (EU 2002/95/EC) and CRoHS (China SJ/T11363-2006) i.e. usable on a global basis.



MBHS78-1-F

## **Technical features**

| CEN  | IEDAI | CDECI  |      | TIONS |
|------|-------|--------|------|-------|
| GLIA | LIVAL | 3F LCI | 1107 | LIONS |

| Product Line              | Coaxial Cable Accessories<br>Hybrid Cable Accessories |  |  |  |
|---------------------------|---|--|--|--|
| Product Type              | Hanger  |  |  |  |
| Hanger Type               | Single Multi-block                                    |  |  |  |
| Transmission Line Type    | UCF78<br>LCF78<br>HB078                               |  |  |  |
| Cable Type                | Coaxial Foam Dielectric<br>Hybrid                     |  |  |  |
| Color                     | Black   |  |  |  |
| MECHANICAL SPECIFICATIONS |   |  |  |  |

## **MECHANICAL SPECIFICATIONS**

**Operation Temperature** 

**Storage Temperature** 

| Cable Size                                  |         | 7/8   |  |  |
|---|---------|---|--|--|
| Number of Cable / Waveguide<br>Runs         |         | 1 per layer, 1 layer, 1 run                                 |  |  |
| Configuration                               |         | incl. Angle member adapter                                  |  |  |
| Angle member adapter clamping range mm (in) |         | 4 / 24 (0.157 / 0.945 )                                     |  |  |
| Angle member adpter threads                 |         | 2x M8   |  |  |
| Material                                    |         | Metal part: Stainless steel<br>Plastic parts: Polypropylene |  |  |
| Length                                      | mm (in) | 150 (5.90) see picture below (L)                            |  |  |
| Height                                      | mm (in) | 70 (2.73) see picture below (H)                             |  |  |
| Width                                       | mm (in) | 50 (1.96) see picture below (W)                             |  |  |
| Recommended / Maximum<br>Clamp Spacing      | m (ft)  | 0.8 / 1 (2.75 / 3.25)                                       |  |  |
| TEMPERATURE SPECIFICATIONS                  |         |   |  |  |

MBHS78-1-F REV: D REV DATE: 05.Apr.2017 www.rfsworld.com

-50 to 85 (-58 to 185)

-50 to 85 (-58 to 185)


°C (°F)

°C (°F)



Single Multi-block hanger one layer, with angle member adapter

| PACKAGING INFORMATION                        |         |                                     |  |  |
|--|---------|-------------------------------------|--|--|
| Package Quantity                             |         | 10                                  |  |  |
| Weight per piece                             | kg (lb) | 0.178 (0.39)                        |  |  |
| Weight per kit                               | kg (lb) | 2 (4.41)                            |  |  |
| Box Dimensions (Bulk Shipping),<br>L x W x H | mm (in) | 280 x 235 x 68 (11.02 x 9.25 x 2.7) |  |  |

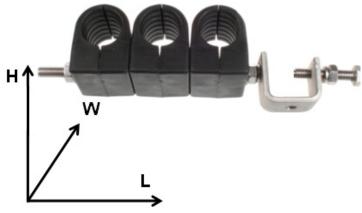

picture shows MBHS78-3-F for illustration purpose

External Document Links Installation Instruction Notes

MBHS78-1-FREV : DREV DATE : 05.Apr.2017www.rfsworld.com