These single-piece high performance coaxial cable connectors are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up the attachment of connectors to RADIAFLEX® cables. The connectors provide outstanding value to users because they permit quick, easy and reliable installation at any location, thereby allowing the operator flexibility while saving installation time and money. They attach to prepared cable in one piece assuring error-free attachment. All connectors are fully tested for mechanical and electrical compliance specifications. They are available in all popular cable sizes in both type N and 7-16 DIN interface.

FEATURES / BENEFITS

- Single-piece design for Fast and Easy Installation Reliable and simple attachment avoids unnecessary connector adjustments and provides outstanding performance. Saves time and provides cost savings.
- Robust Mechanical Design Low and consistent IM performance.
- Excellent Electrical Performance Low VSWR
- Totally Waterproof Assures safe, long term operation in the harshest of environments.



RADIAFLEX connector

Technical features

Transmission Line Type	Coaxial Cable		
Cable Size	1/2		
Cable Type	Radiating		
Model Series	all ALF and RLK12-50A-Series		
Connector Interface	N		
Connector Type	Straight		
Sealing Method	Shrinking Sleeve		
Gender	Female		

ELECTRICAL SPECIFICATIONS

Nominal Impedance, ohms	Ohm	50
Maximum Frequency	GHz	6
VSWR, Return Loss	VSWR (dB)	0 - 1 GHz: 1.04 (34.1) 1 - 2 GHz: 1.06 (30.7) 2 - 3 GHz: 1.08 (28.3) 3 - 4 GHz: 1.11 (25.6) 4 - 6 GHz: 1.15 (23.1) 6 - 7,2 GHz: 1.20 (20.8)

MECHANICAL SPECIFICATIONS


Length	mm (in)	70.8 (2.79)
Outer Diameter	mm (in)	26.8 (1.06)
Body Material		Brass / Plating: Tri metal
Inner Contact Material		Copper / Plating: Silver
Inner Contact Attachment		Spring Finger / Plating: silver
Outer Contact Attachment		Spring loop / Plating: silver

TESTING AND ENVIRONMENTAL

Waterproof Level	IP68

NF-RA12-012 REV: D REV DATE: 29 Oct 2024 www.rfsworld.com



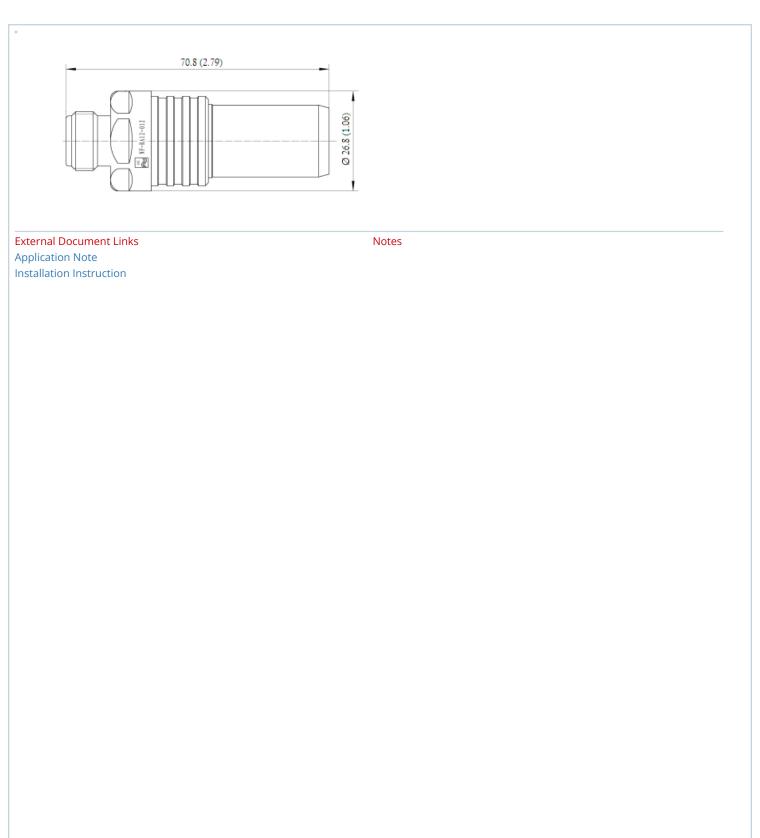

NF-RA12-012 REV : D REV DATE : 29 Oct 2024 www.rfsworld.com