



OMNI FIT™ high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminum) cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment.

**FEATURES / BENEFITS**

- Cost effective two-piece design for safe and easy installation
- Compatible with copper and aluminium cable types i.e. one connector for both outer conductor materials eliminates the risk of faulty connector installation and helps to keep inventory down
- Robust mechanical design for low and consistent intermodulation performance i.e. keeps the mobile network performance up reduces the number of dropped calls and avoids revenue losses
- Superior electrical performance for consistent and repeatable VSWR i.e. ensure network system performance
- Waterproof to IP 68 i.e. no downtime risk, secures revenue
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis



NM-LCF12-C03

**Technical features**

**GENERAL SPECIFICATIONS**

<b>Transmission Line Type</b>		Coaxial Cable		
<b>Cable Size</b>		1/2		
<b>Cable Type</b>		Foam Dielectric	Radiating	
<b>Model Series</b>		LCF12-50 Series	ICA12-50 Series	RCF12-50 Series
<b>Connector Interface</b>		N		
<b>Connector Type</b>		OMNI FIT™ Standard		
<b>Sealing Method</b>		O-ring		
<b>Gender</b>		Male		

**ELECTRICAL SPECIFICATIONS**

<b>Nominal Impedance, ohms</b>	Ohm	50		
<b>3rd Order IM Product @ 2x20 Watts</b>	dBc	-157 ; typical -160		
<b>Maximum Frequency</b>	GHz	6.0		
<b>VSWR, Return Loss</b>	VSWR (dB)	0 <math>f \le 1.0 \text{ GHz}</math>: 1.03 (36.6) 1.0 <math>f \le 2.7 \text{ GHz}</math>: 1.04 (34.1) 2.7 <math>f \le 3.7 \text{ GHz}</math>: 1.08 (28.3) 3.7 <math>f \le 5.0 \text{ GHz}</math>: 1.15 (23.1) 5.0 <math>f \le 6.0 \text{ GHz}</math>: 1.25 (19.1)		

**MECHANICAL SPECIFICATIONS**

<b>Plating Outer/Inner</b>		Trimetal/Silver		
<b>Length</b>	mm (in)	56.5 (2.23)		
<b>Outer Diameter</b>	mm (in)	22 (0.87)		
<b>Weight</b>	kg (lb)	0.077 (0.17)		
<b>Inner Contact Attachment</b>		Spring Finger		
<b>Outer Contact Attachment</b>		Spring C-Ring		




**ACCESSORIES**

Wrench size front	mm (in)	20 (13/16)
Wrench size rear	mm (in)	20 (13/16)
Trimming Tool		TRIM-SET-L12-C02

**TESTING AND ENVIRONMENTAL**

Waterproof Level		IP68
------------------	--	------

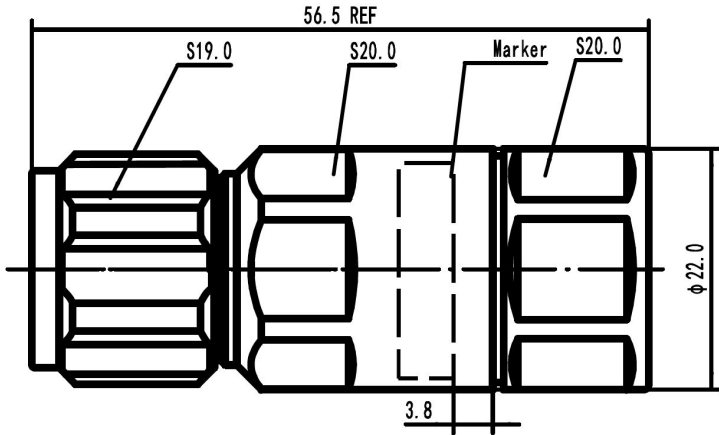

NM-LCF12-C03 Outline Drawing

[External Document Links](#)  
[Installation Instruction](#)

[Notes](#)