



NM-LCF12-D01

N Male Connector for 1/2" Coaxial Cable (includes DragonSkin), OMNI FIT™ Premium, Straight, Polymer claw and compression sealing

OMNI FIT™ high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminium) cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment. All RFS connectors are fully tested for mechanical and electrical compliance to industry specifications.

The 7-16 connector is the most rugged RF connection meeting all requirements even under the most severe environmental conditions. Sealing against outer conductor and jacket by means of the polymer claw and 360° compression fit. Multifunctional, self-lubricating HighTech polymer assembly locks on cable corrugation, avoids electrochemical potential differences and compression-fits to the jacket. This connector can be used on RFS DragonSkin cable.

FEATURES / BENEFITS

- Ultra high PIM performance i.e. reduced interference leading to high customer satisfaction
- Two-piece design i.e. visual inspection of interlocking leads to improved installation security
- OMNI FIT™ concept i.e. streamlined order management and reduced stock level
- Watertight sealing in mated and unmated condition, i.e. reduced efforts during installation and improved security during operation
- Unique NiTin plating i.e. extreme resistance against corrosion even under hardest climatic and environmental circumstances
- Multi-thread (Tristart) design i.e. simplified and accelerated tightening process
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis



OMNI FIT™ Premium Connectors

Technical features

GENERAL SPECIFICATIONS

| | | |
|------------------------|--|---|
| Transmission Line Type | | Coaxial Cable |
| Cable Size | | 1/2 |
| Cable Type | | Foam Dielectric |
| Model Series | | LCF12-50 Series, ICA12-50 Series, RCF12-50 Series, DragonSkin |
| Connector Interface | | N |
| Connector Type | | OMNI FIT™ PREMIUM Straight |
| Sealing Method | | Polymer claw + 360° Compression |
| Gender | | Male |

ELECTRICAL SPECIFICATIONS

| | | |
|-----------------------------------|-----------|---|
| Nominal Impedance, ohms | Ohm | 50 |
| 3rd Order IM Product @ 2x20 Watts | dBc | -156 ; typical -162 |
| Maximum Frequency | GHz | 3.7 |
| VSWR, Return Loss | VSWR (dB) | 0 < f ≤ 1.0 GHz: 1.02 (40) 1.0 < f ≤ 2.7 GHz: 1.03 (36.6) 2.7 < f ≤ 3.7 GHz: 1.06 (30.7) |

MECHANICAL SPECIFICATIONS

| | | |
|--------------------------|---------|---------------|
| Plating Outer/Inner | | NiTIn/Silver |
| Length | mm (in) | 64.05 (2.52) |
| Outer Diameter | mm (in) | 29 (1.14) |
| Weight | kg (lb) | 0.11 (0.24) |
| Inner Contact Attachment | | Basket |
| Outer Contact Attachment | | 360° clamping |



NM-LCF12-D01



N Male Connector for 1/2" Coaxial Cable (includes DragonSkin), OMNI FIT™ Premium, Straight, Polymer claw and compression sealing

ACCESSORIES

| | | |
|-------------------|---------|--------------------------------------|
| Wrench size front | mm (in) | 18 |
| Wrench size rear | mm (in) | 26 |
| Trimming Tool | | TRIM-SET-L12-D01 TRIM-LCF12-D01-A |

TESTING AND ENVIRONMENTAL

| | | |
|------------------|--|------|
| Waterproof Level | | IP68 |
|------------------|--|------|

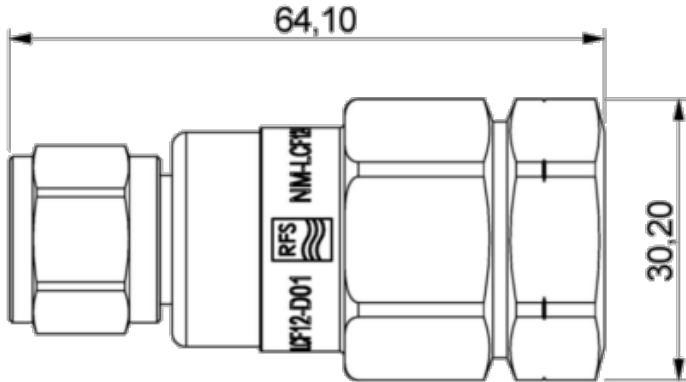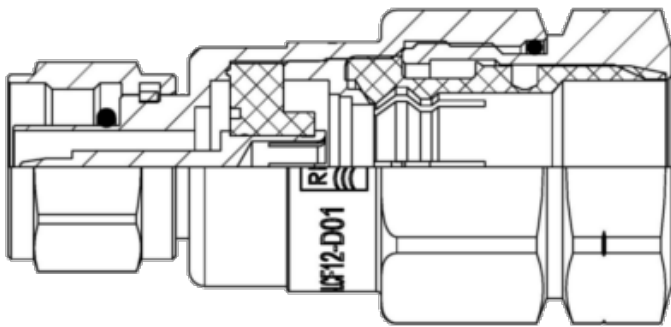

[External Document Links](#)
[Installation Instruction](#)

[Notes](#)