




Coaxial Adapter N male - male, right angle

## FEATURES / BENEFITS

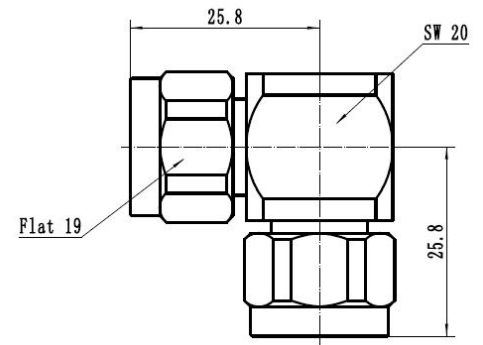

## Technical features

## STRUCTURE

Product Line		Coaxial Cable Components
Product Type		Coaxial Adapter

## MECHANICAL SPECIFICATIONS

Connector A		N Male
Center Contact Connector A		Brass, silver plated
Outer Contact Connector A		Brass, CuSnZn plated
Connector B		N Angle Male
Center Contact Connector B		Brass, silver plated
Outer Contact Connector B		Brass, CuSnZn plated
Dielectric		PTFE
Sealing class		IP68, connected

## ELECTRICAL SPECIFICATIONS

Frequency Range - MHz		DC - 6000
VSWR, Return Loss	VSWR (dB)	0 - 3000 MHz: 1.10 (26.4) 3000 - 6000 MHz: 1.15 (23.1)
Insertion Loss, dB (Max)	dB	0.1
3rd Order IM Product @ 2x20 Watts	dBc	-163
Power Rating	kW	0.5

## TEMPERATURE SPECIFICATIONS

Operation Temperature	°C (°F)	-45 to 85 (-49 to 185)
-----------------------	---------	------------------------

## PACKAGING INFORMATION

Package Quantity		1
------------------	--	---

External Document Links

Notes