




RFS' HYBRIFLEX™ cabling solution for Remote Radio Unit (RRU) combines optical fiber and DC power in a single lightweight aluminum corrugated cable, making it the world's most innovative solution for RRU deployments. It was developed to reduce installation complexity and cost at Cellular sites.

HYBRIFLEX™ cabling solutions allows mobile operators deploying RRU architecture to standardized installation process and eliminates the need for and the cost of cable grounding. The **HYBRIFLEX™** Power Connect cable **PW-S-16U3-C** is part of a site installation kit. It consists of three unshielded pairs and a CPR class.

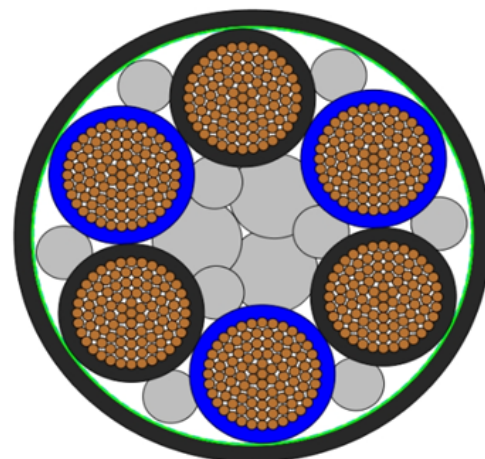

FEATURES / BENEFITS

- UV resistant jacket
- Comply with IEC 60228
- Flexible

Technical features

STRUCTURE

Cable Type		HYBRIFLEX™ Power Cable
Fire Performance		CPR B2ca s1 d0 a1, LSZH

MECHANICAL SPECIFICATIONS

Outer Diameter Nominal	mm (in)	21.25 (0.837)
Minimum Bending Radius, (Operating)	mm (in)	120 (4.724)
Minimum Bending Radius, (Installation)	mm (in)	254 (10)
Recommended / Maximum Clamp Spacing	m (ft)	0.6 / 1 (2 / 3.25)

DC POWER CABLE SPECIFICATIONS

Number of DC Pairs		3
Maximum DC-Resistance Power Cable	Ω/km (Ω/kft)	1.21 (0.37)
Cross Section of Power Cable	mm ² (AWG)	16 (6)
DC Wire Jacket Material		UV stable black JFN Blue and Black
DC Cable Single Bending Radius	mm (in)	53 (2.1)
DC Cable Diameter	mm (in)	7 (0.276)

CABLE JACKET

UV-Protection Individual and External Jacket		Yes
---	--	-----

TESTING AND ENVIRONMENTAL

Storage Temperature	°C (°F)	-40 to 85 (-40 to 185)
Operation Temperature	°C (°F)	-40 to 85 (-40 to 185)
Installation Temperature	°C (°F)	-20 to 50 (-4 to 122)

[External Document Links](#)

[Notes](#)