




Contact Shim for PBR84

FEATURES / BENEFITS

Waveguide installation

- The shim offers pressure tightness between two gasket sealed flanges
- The shim offers maximum possible RF contact.

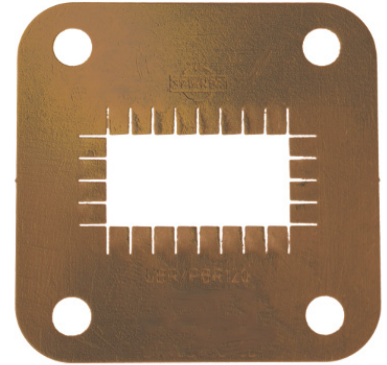

Technical features

STRUCTURE

| | | |
|---|--|--------------|
| Type of Rectangular Waveguide Component | | Contact Shim |
| Waveguide Size IEC (EIA) | | R84 (WR112) |
| Flange | | UBR84 |
| Flange Finish | | un-plated |
| Package Quantity | | 1 |

ELECTRICAL SPECIFICATIONS

| | | |
|---------------------------------|-----------|-------------|
| Minimum Return Loss (max. VSWR) | dB (VSWR) | 46.1 (1.01) |
|---------------------------------|-----------|-------------|

MATERIAL

| | | |
|----------|--|------------------|
| Material | | Copper beryllium |
|----------|--|------------------|

External Document Links

Notes