

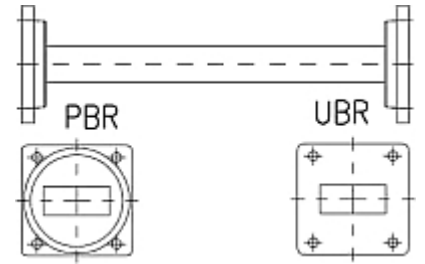


Rectangular Waveguide R 320 Straight Section,
flanges PBR/UBR 320, $f = 26.3\text{--}40.0\text{ GHz}$,
VSWR max 1.08, $A = 100\text{ mm}$ (3.9in),
gasket and screw kit enclosure
made of copper

FEATURES / BENEFITS

Waveguide installation

- The rectangular waveguide component provides simple installation in particular difficult cases
- It can be installed where less space is available
- It provides outstanding electrical performance

**Technical features****STRUCTURE**

Type of Rectangular Waveguide Component		Straight Section
Waveguide Size IEC (EIA)		R320 (WR28)
Flange A		PBR320
Flange B		UBR320
Flange Finish		Brass un-plated
Package Quantity		1

ELECTRICAL SPECIFICATIONS

Minimum Return Loss (max. VSWR)	dB (VSWR)	28.3 (1.08)
---------------------------------	-----------	-------------

MECHANICAL SPECIFICATIONS

Length	mm (in)	100 (3.9)
--------	---------	-----------

MATERIAL

Material		Copper
Color		Black

External Document Links

Notes