



UC90

Spare Capsule for Gas Tube Surge Arrestor

90 V gas discharge arrestor for *-UCX-01 Series.

FEATURES / BENEFITS

Sparkover voltage:

- Static (100 V/s) 70 V to 110 V
- Dynamic (1 kV/ μ s) $\leq$ 700 V

RF power rating: $\leq$ 20 W (unmodulated; VSWR=1; sea level; 40 °C)

Arc (residual) voltage: $\leq$ 25 V

Allowed surge current:

- Single pulse (8/20 μ s) min. 25 kA
- 5 pulses in 3 min. (8/20 μ s) min. 20 kA

Isolation resistance: $\geq$ 1 GOhm

Capacitance: $\leq$ 1 pF

Free from radioactivity




Technical features

STRUCTURE

Product Line		Coaxial Cable Components
Product Type		Surge Arrestor
Surge Arrestor Type		Spare Capsule

PACKAGING INFORMATION

Package Quantity		1
------------------	--	---

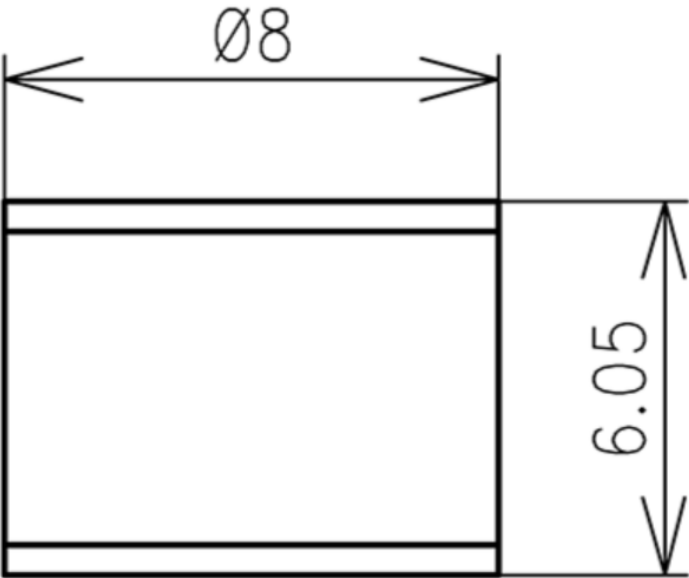

External Document Links

Notes