



RFS SerenityLine is Class 4 and advanced Class 3 antennas. They are designed to provide the market's best RF performance and allow users to deploy new microwave links even in ultra-dense areas where high levels of interference are present.

- Available from 6 to 42 GHz frequency in both single (SL/UL) and dual polarization (SLX/ULX) versions
- Sustain a survival wind speed up to 250 km/h (155 mph) . 0.3m (1ft) antenna survives even 320 km/h (195 mph).
- An optional sway bar for antennas 1 m (3ft) and larger is available

**FEATURES / BENEFITS**

- Increase link capacity of the network
- Improved radiation patterns compliant to ETSI Class 4 providing better performance
- Less interference and higher carrier-to-interference ratio
- Allows radios to operate at higher modulation levels
- Minimize the total cost of ownership
- Improved network efficiency
- Facilitates better re-use of a frequency channel
- In-field upgrades – flexible feed design -- for example, upgrade from single to dual polarization



**Technical features**

**GENERAL SPECIFICATIONS**

<b>Product Type</b>		Point to point antennas
<b>Profile</b>		SerenityLine
<b>Performance</b>		Super High
<b>Polarization</b>		Single
<b>Antenna Input</b>		CPR90G
<b>Reflector</b>		1-part
<b>Radome</b>		Flexible, White color
<b>Antenna color</b>		White RAL 9010
<b>Swaybar</b>		1: 2.0 m x Ø60 mm

**ELECTRICAL SPECIFICATION**

<b>Frequency</b>	GHz	10 - 11.7
<b>3dB beamwidth</b>	degrees	1
<b>Low Band Gain</b>	dBi	43.5
<b>Mid Band Gain</b>	dBi	44.1
<b>High Band Gain</b>	dBi	44.9
<b>F/B Ratio</b>	dB	85
<b>XPD</b>	dB	40 @ boresight 35 @ other areas
<b>Max VSWR / R L</b>	VSWR / dB	1.1 (26)
<b>Regulatory Compliance</b>		ETSI EN 302217 Range 1 Class 4, XPD Category 3 FCC Category A



**MECHANICAL SPECIFICATIONS**

Diameter	ft (m)	6 (1.8)
Elevation Adjustment	degrees	±5
Azimuth Adjustment	degrees	±5
Polarization Adjustment	degrees	±5
Mounting Pipe Diameter minimum	mm (in)	114 (4.5)
Mounting Pipe Diameter maximum	mm (in)	114 (4.5)
Survival Windspeed	km/h (mph)	200 (125)
Operational Windspeed	km/h (mph)	190 (118)
Approximate Weight	kg (lb)	110 (242)

**STRUCTURE**


Radome Material	PVC coated fabric
-----------------	-------------------

**OTHER ACCESSORIES**

optional Swaybar	1: SMA-SK-60-2000A (2.0 m x Ø60 mm)
Further Accessories	SMA-SKO-UNIVERSAL-L : Universal sway bar fixation kit

**MOUNT OUTLINE**


Dimension_A	mm (in)	2000 (79)
Dimension_B	mm (in)	1495 (58.9)
Dimension_C	mm (in)	364 (14.3)
Dim_D- 114mm(4.5_in)Pipe	mm (in)	175 (6.9)
Dimension_E	mm (in)	283 (11.1)
Dimension_F	mm (in)	590 (23.2)
Dimension_G	mm (in)	306 (12)

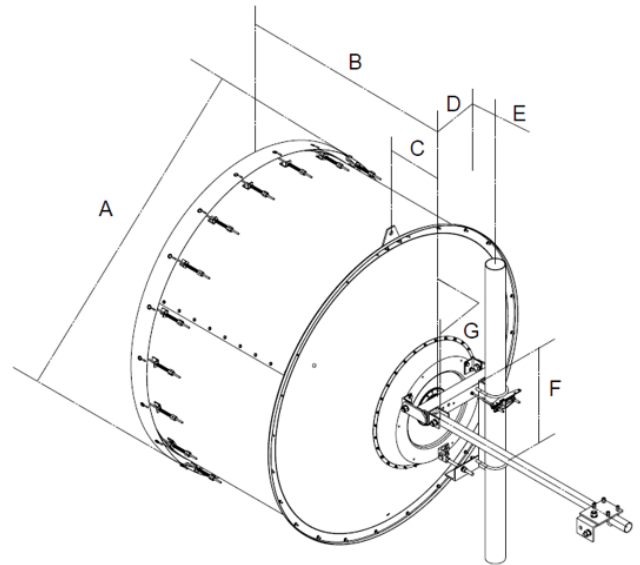



**WINDLOAD**

<b>Fs Side force max. @ survival wind speed</b>	N (lb)	4667 (1049)
<b>Fa Axial force max. @ survival wind speed</b>	N (lb)	7527 (1692)
<b>M Torque maximum @ survival wind speed Nm (ft lb)</b>	Nm (lb ft)	6554 (4855)

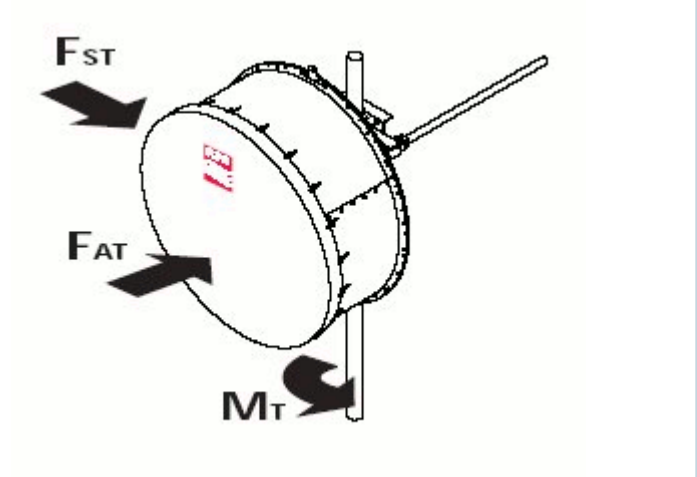

**External Document Links**

- Antenna Installation
- RF interface installation
- RPE (IQ-Link format) 10.7 to 11.7 GHz
- RPE (PDF format) 10.7 to 11.7 GHz
- RPE (pathloss format) 10.7 to 11.7 GHz
- RPE (IQ-Link format) 10.0 to 11.7 GHz
- RPE (PDF format) 10.0 to 11.7 GHz
- RPE (pathloss format) 10.0 to 11.7 GHz

**Notes**