




**RFS' HYBRIFLEX™** Optical fibre wall outlet is a fixed connection device, which is used to terminate the drop cable in the office area, residential area, business district, and is made up of bottom box and front cover.

Optical fibre wall outlet can be classified into exposed and concealed type for installation.

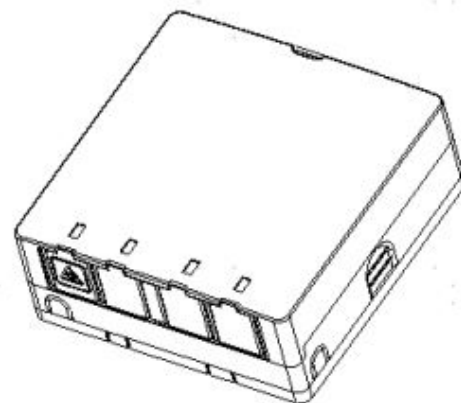

**FEATURES / BENEFITS**

- Atmospheric pressure: 70kPa 106kPa
- Cable types: drop cable, pigtail, outdoor cable(Φ8mm Φ10.5mm)
- Meet domestic standard Q/CT 2353-2011.

**Technical features**

**GENERAL SPECIFICATIONS**

<b>Product Type</b>		Hybriflex Wall Outlet Box
---------------------	--	---------------------------

**MECHANICAL SPECIFICATIONS**

<b>Dimensions (LxWxD)</b>	mm (in)	80 x 80 x 31 (3.15 x 3.15 x 1.22)
---------------------------	---------	-----------------------------------

**TESTING AND ENVIRONMENTAL**

<b>Operation Temperature</b>	°C (°F)	-20 to 65 (-4 to 149)
------------------------------	---------	-----------------------






**FAMILY INFORMATION**

	WOIF-0Z02SS-APMW-YC	WOIF-0Z04SS-APMW-YC
<b>Quantity of Adapters</b>	2	4
<b>Quantity of Pigtails</b>	2	4



**WOIF-0ZXXSS-APMW-YC**

Hybriflex Wall Outlet Box on Wall mounted, incl. Pigtails and Adapter

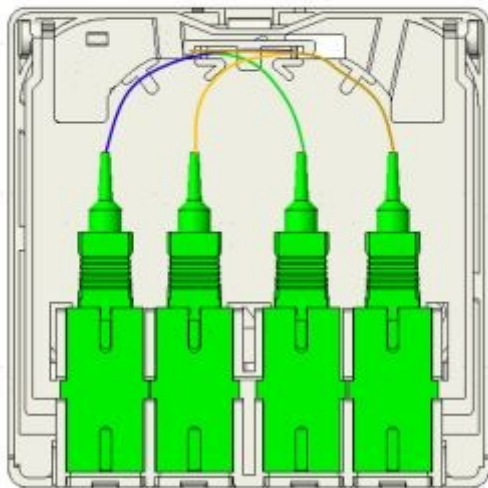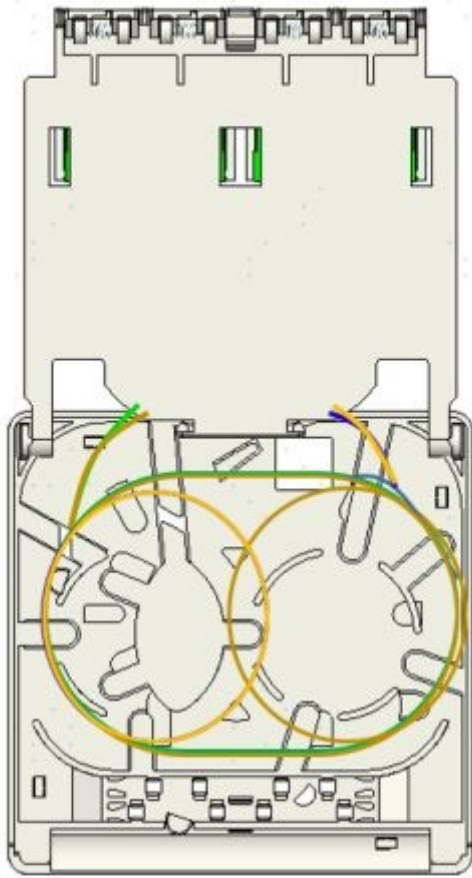

Backview of a double and single layer

[External Document Links](#)

[Notes](#)