



**RFS' HYBRIFLEX™** Optical fibre wall outlet is a fixed connection device, which is used to terminate the drop cable in the office area, residential area, business district, and is made up of bottom box and front cover.

Optical fibre wall outlet can be classified into exposed and concealed type for installation.



#### FEATURES / BENEFITS

- Atmospheric pressure: 70kPa 106kPa
- Cable types: drop cable, pigtail, outdoor cable( $\Phi$ 8mm  $\Phi$ 10.5mm)
- Meet domestic standard Q/CT 2353-2011.

External Document Links

Notes

## Technical features

#### GENERAL SPECIFICATIONS

Product Type		Hybriflex Wall Outlet Box
--------------	--	---------------------------

#### MECHANICAL SPECIFICATIONS


Dimensions (LxWxD)	mm (in)	86 x 86 x 26 (3.38 x 3.38 x 1.02)
--------------------	---------	-----------------------------------

#### TESTING AND ENVIRONMENTAL

Storage Temperature	°C (°F)	-40 to 70 (-40 to 158 )
Operation Temperature	°C (°F)	-40 to 60 (-40 to 140 )

#### FAMILY INFORMATION

	WOIF-0Z01SS-APPD-YC	WOIF-0Z02SS-APPD-YC
Quantity of Adapters	1	2
Quantity of Pigtails	1	2

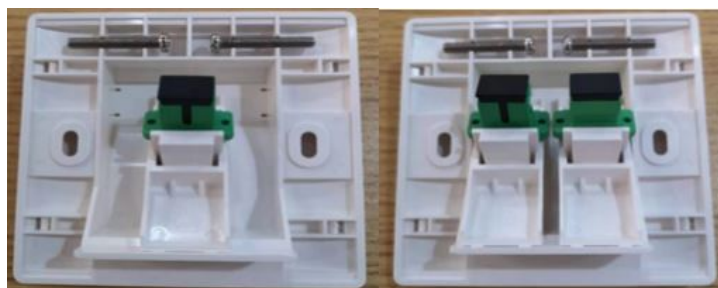

Backview of a double and single layer



Drawing of a Pigtail