

Radio Frequency Systems' CELLFLEX® Factory-Fit Jumpers feature specially designed connectors which are soldered-on in a strictly controlled industrial process to ensure industry leading performance for today's high-performance wireless systems. The connector design and manufacturing process has been optimized to produce premium VSWR and IM levels. Injection molded boots provide reliable and repeatable additional sealing level and strain relief. Our facilities produce and stock all popular lengths as required by the industry, and can deliver custom lengths with premium VSWR and IM levels on request.

FEATURES / BENEFITS

- **Stable premium VSWR, outstanding and consistent intermodulation performance - 4.3-10 side not relying on coupling torque**  
Improves network performance, reduces the number of dropped calls and avoids revenue loss.
- **Waterproof to IP 68**  
No downtime risk, secures revenue.
- **Smaller connector footprint for 4.3-10**  
Enables tighter spacing of connections for antennas and RRHs.
- **Available with standard ""J"" or flame retardant ""JFN"" jacket types**  
Usable in all applications.
- **Compliant to RoHS (EU) and CRoHS (China)**  
Usable on a global basis.



f. e. 43M43MS14-0100FFP

Technical features

STRUCTURE

Cable Type		1/4" Superflexible Foam
Jumper Type		Factory-Fit (Premium)
Dielectric		Foam Polyethylene
Gasket		Silicone rubber
Jacket		JFN: halogen free, non corrosive, flame retardant, low smoke, polyolefin, Test methods for fire behaviour of cable: IEC 60754-1/-2 halogen free and non corrosive, IEC 61034 low smoke emission, IEC 60332-1 flame retardant

MECHANICAL SPECIFICATIONS

Minimum Bend Radius	mm (in)	25 (0.98)
---------------------	---------	-----------

TESTING AND ENVIRONMENTAL

Sealing class		IP68
---------------	--	------

TEMPERATURE SPECIFICATIONS

Installation Temperature	°C (°F)	-25 to 60 (-13 to 140 )
Operation Temperature	°C (°F)	-50 to 85 (-58 to 185 )
Storage Temperature	°C (°F)	-70 to 85 (-94 to 185 )

ELECTRICAL SPECIFICATIONS

Intermodulation, 3rd Order	dBc	≤ -162 static & -159 dynamic
Peak Power Rating	kW	5.5
RF Peak Voltage	V	740

JUMPER VSWR 0 - 10 M

Frequency [MHz]	Straight / Straight [dB]	Right Angle / Right Angle [dB]
0 - 1000	>28.3	>28.3
>1000-1700	>28.3	>24.4

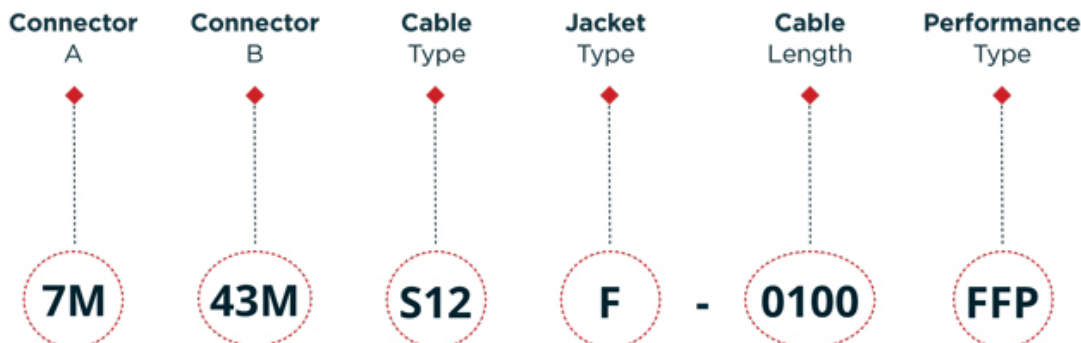
>1700-2200	>28.3	>24.4
>2200-2700	>26.4	>23.0
>2700-3800	>23.1	>19.5
>3800-5000	>20.8	>18.1
>5000-6000	>17.7	>17.0

JUMPER VSWR 10 - 20 M		
Frequency [MHz]	Straight / Straight [dB]	Right Angle / Right Angle [dB]
0 - 1000	>28.3	>28.3
>1000-1700	>26.4	>22.0
>1700-2200	>26.4	>22.0
>2200-2700	>24.9	>22.0
>2700-3800	>23.1	>17.0
>3800-5000	>19.1	>16.0
>5000-6000	>17.7	>15.0

COMBINATIONS		
Model Name	Connector 1	Connector 2
43M43MS14F-XXXXFFP	4.3-10 Male	4.3-10 Male
43M43MRS14F-XXXXFFP	4.3-10 Male	4.3-10 Male Right Angle
43MR43MRS14F-XXXXFFP	4.3-10 Male Right Angle	4.3-10 Male Right Angle
43MNXMS14F-XXXXFFP	4.3-10 Male	NEX10-Male
NXMNXMS14F-XXXXFFP	NEX10-Male	NEX10-Male
43MRNXMS14F-XXXXFFP	4.3-10 Male Right Angle	NEX10-Male
XXXX in the model name is the length; as well for jumper with boots acc. to nomenclature		

**JUMPER-S14F-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 1/4" Superflexible Foam, with flame retardant jacket

**RFS JUMPER MODEL NOMENCLATURE****7M & 43M  
CONNECTORS  
A & B**

<b>7M</b>	7-16 Male
<b>7F</b>	7-16 Female
<b>7MR</b>	7-16 Male Right Angle
<b>43M</b>	4.3-10 Male
<b>43F</b>	4.3-10 Female
<b>43MH</b>	4.3-10 Male Handscrew
<b>43MP</b>	4.3-10 Male Push Pull
<b>43MR</b>	4.3-10 Male Right Angle
<b>NM</b>	N-Type Male
<b>NF</b>	N-Type Female
<b>NMR</b>	N-Type Male Right Angle
<b>NXM</b>	NEX10 Male
<b>NXMP</b>	NEX10 Male Push Pull
<b>7MB</b>	7-16 Male with Weatherboots
<b>43MB</b>	4.3-10 Male with Weatherboots
<b>NMB</b>	N-Type Male with Weatherboots

**S12  
CABLE  
TYPE**

<b>L38</b>	3/8" Low Loss Coax
<b>L12</b>	1/2" Low Loss Coax
<b>S14</b>	1/4" Superflexible Coax
<b>S38</b>	3/8" Superflexible Coax
<b>S12</b>	1/2" Superflexible Coax

**F  
JACKET  
TYPE**

<b>F</b>	JFN Flame Retardant
<b>Blank</b>	PE

**0100  
CABLE  
LENGTH\***

<b>0100</b>	1 meter
<b>0200</b>	2 meter
<b>0250</b>	2.5 meter
<b>1000</b>	10 meter
<b>1500</b>	15 meter
<b>030</b>	3 feet
<b>060</b>	6 feet
<b>100</b>	10 feet
<b>150</b>	15 feet
<b>200</b>	20 feet

**FFP  
JUMPER  
PERFORMANCE**

<b>FFP</b>	Factory-Fit Premium
<b>FFPB</b>	Factory-Fit Premium; Bird-Proof Option
<b>FFS</b>	Factory-Fit Standard
<b>UPM</b>	Ultra PIM Performance

**NOTES:**

\* 4 digits indicate meter length, 3 digits indicate feet length  
Others lengths available on request

**External Document Links**[Cable SCF14-50JFN](#)[Handling instruction](#)



**JUMPER-S14F-FFP**

CELLFLEX® Factory-Fit Jumper Assembly, 1/4" Superflexible Foam, with flame retardant jacket

[Jumper Brochure](#)

Notes