


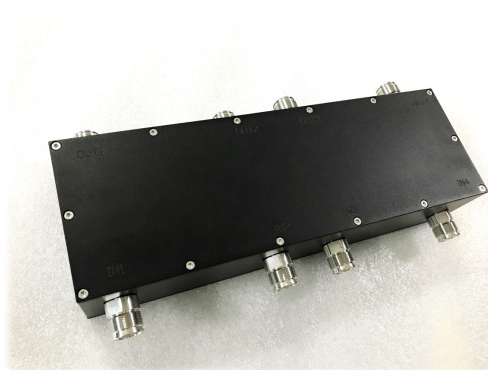

The CDS4x4-43-617/3800-ECO hybrid coupler which equally combines four wireless signals and transfers the combined signal to four output ports. The product is designed for wireless services and applications in the frequency band from 617-3800MHz including 2G/3G/4G. The broad frequency range and outstanding PIM rating is ideally suited for multi-band distributed antenna systems or in combination with RADIAFLEX® radiating cables.

**FEATURES / BENEFITS**

- 4.3-10-female interfaces
- PIM optimized design (160dBc @2x43dBm)
- Ideal for all kind of DAS applications
- Low insertion loss
- High power handling

**Technical features****GENERAL SPECIFICATIONS**

Product Type		Directional Hybrid Coupler
Techn. Application		Indoor
Number of Input Ports		4
Number of Output Ports		4
Connector Type		4.3-10 female

**ELECTRICAL SPECIFICATIONS**

Frequency Range	MHz	617 - 3800
Impedance	Ohm	50
VSWR / Return Loss	VSWR/dB	1.30/17.7 @ - GHz
Intermodulation (IM3)		-160 dBc (2x43dBm)
Isolation min	dB	25 @617 - 2700 22 @2701 - 3800
Coupling Value	dB	6 ±1.5 @617 - 693 MHz 6 ±1.2 @694 - 3800 MHz
Input Power comment		200W per Port

**TEMPERATURE SPECIFICATIONS**


Temperature Range	°C (°F)	-25 to 65 (-13 to 149)
-------------------	---------	------------------------

**MECHANICAL SPECIFICATIONS**

Height	mm (in)	61.7 (2.429)
Width	mm (in)	100.6 (3.961)
Length	mm (in)	305 (12.008)
Weight	kg (lb)	3.4 (7.496)

**TESTING AND ENVIRONMENTAL**

Environmental Class		IP65
---------------------	--	------

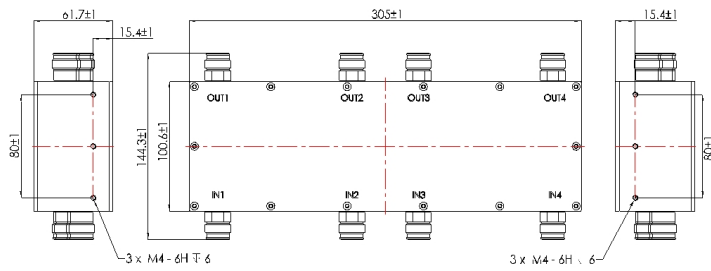

#### External Document Links

#### Notes