



**NM-SCF14-D01**

N Male Connector for 1/4" Coaxial Cable, OMNI FIT™ Premium, Straight, threaded gasket and 360° compression sealing



OMNI FIT™ Premium Connectors

OMNI FIT™ high performance connectors are designed for use with both CELLFLEX® (copper) and CELLFLEX® Lite (aluminium) cables. They are designed specifically to provide the highest quality connector-cable interface while simplifying and speeding up connector attachment. All RFS connectors are fully tested for mechanical and electrical compliance to industry specifications.

The N connector meets all technical requirements and covers high frequencies as well as legacy applications. Sealing against outer conductor and jacket by means of threaded gasket and 360° compression fit. Multifunctional, self-lubricating HighTech polymer assembly locks on cable corrugation, avoids electrochemical potential differences and compression-fits to the jacket;

**FEATURES / BENEFITS**

- Ultra high PIM performance i.e. reduced interference leading to high customer satisfaction
- Two-piece design i.e. visual inspection of interlocking leads to improved installation security
- OMNI FIT™ concept i.e. streamlined order management and reduced stock level
- Watertight sealing in mated and unmated condition, i.e. reduced efforts during installation and improved security during operation
- Unique NiTin plating i.e. extreme resistance against corrosion even under hardest climatic and environmental circumstances
- Multi-thread (Tristart) design i.e. simplified and accelerated tightening process
- RoHS (EU) and CRoHS (China) compliant i.e. can be used on a global basis

**Technical features**

**GENERAL SPECIFICATIONS**

Transmission Line Type		Coaxial Cable
Cable Size		1/4
Cable Type		Foam Dielectric Superflexible
Model Series		SCF14-50 Series
Connector Interface		N
Connector Type		OMNI FIT™ PREMIUM Straight
Sealing Method		Threaded Gasket + 360° Compression
Gender		Male

**ELECTRICAL SPECIFICATIONS**

Nominal Impedance, ohms	Ohm	50
3rd Order IM Product @ 2x20 Watts	dBc	-156 ; typical -162
Maximum Frequency	GHz	6.0
VSWR, Return Loss	VSWR (dB)	0 <math>f \le 1.0 \text{ GHz}</math>: 1.03 (36.3) 1.0 <math>f \le 2.0 \text{ GHz}</math>: 1.06 (30.7) 2.0 <math>f \le 2.7 \text{ GHz}</math>: 1.08 (28.3) 2.7 <math>f \le 3.7 \text{ GHz}</math>: 1.12 (24.9) 3.7 <math>f \le 5.0 \text{ GHz}</math>: 1.13 (24.3) 5.0 <math>f \le 6.0 \text{ GHz}</math>: 1.14 (23.7)

**MECHANICAL SPECIFICATIONS**

Plating Outer/Inner		NiTIn/Silver
Length	mm (in)	44.6 (1.76)
Outer Diameter	mm (in)	20.2 (0.8)
Weight	kg (lb)	0.06 (0.13)
Inner Contact Attachment		Spring Finger
Outer Contact Attachment		360° clamping



**NM-SCF14-D01**


N Male Connector for 1/4" Coaxial Cable, OMNI FIT™ Premium,  
Straight, threaded gasket and 360° compression sealing

**ACCESSORIES**

Wrench size front	mm (in)	18 (7/10)
Wrench size rear	mm (in)	18 (7/10)

**TESTING AND ENVIRONMENTAL**

Waterproof Level		IP68
------------------	--	------

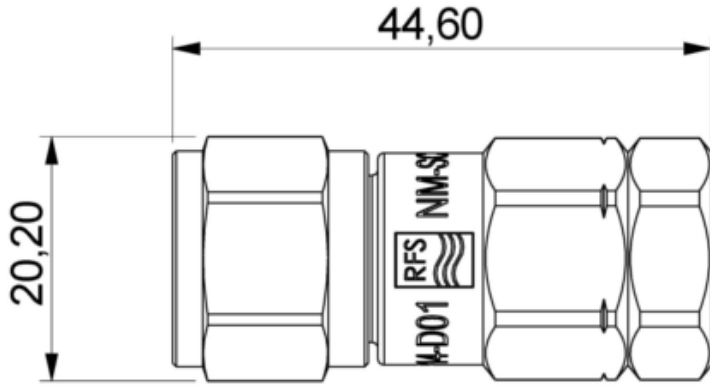

External Document Links

[Installation Instruction](#)

Notes